CREW-IN TEST PROBE

Spring-loaded test probe GKS-050 305 050 A 1503 M

Item GKS-050-0048





 Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)

- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available

INGUN SELECTION

General data

Product group Screw-in test probe Screw-in test probe Sub-product group GKS-050 M screw-in Series Grid 1.27 mm [50 mil] Contacting from Pad, Female connector Magnetic Installation type Screw-in Quick-exchange system Yes Adjustable installation height Non-rotating No Screw-in torque 0.5 - 1 cNm [.044 - .088 lbf·in] Compatible receptacle(s) KS-050 M - 40 °C [- 104 °F] Min. temperature + 80 °C [+ 176 °F] Max. temperature RoHS-compliant RoHS-3;6c



Current load capacity / rated current 3 A
Typical resistance (Ri) <20 mOhm

Mechanical data

 Total length
 47.3 mm [1.86 in]

 Barrel diameter
 0.79 mm [.031 in]


 Maximum stroke
 6.35 mm [.25 in]

 Spring pre-load
 0.58 N [2.08 ozf]

 Collar height
 03

 Spring force at working stroke
 1.5 N [5.39 ozf]

 Recommended working stroke
 4.3 mm [.169 in]

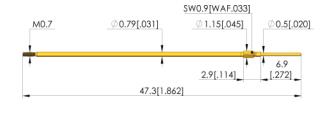


Tip style data

Tip style 05 bullet-nosed (full radius)
Tip diameter 0.5 mm [.019 in]
Tip style surface A gold
Tip style material 3 CuBe

Spring-loaded test probe GKS-050 305 050 A 1503 M Item GKS-050-0048





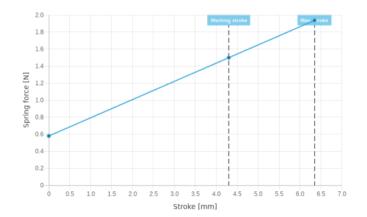

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com













Learn more about

