

Spring-loaded test probe

GKS-051 305 040 A 2000 K3MM310

Item GKS-051-0116



ingun[®]

Partner for Future Technology

General data

Product group	Accessories (GKS / ADA)
Sub-product group	RF inner conductor
Series	GKS-051
Grid	1.27 mm [50 mil]
Contacting from	Pad, Female connector
Magnetic	Yes
Installation type	Plug-in
Quick-exchange system	Yes
Adjustable installation height	No
Non-rotating	No
Min. temperature	- 40 °C [- 104 °F]
Max. temperature	+ 80 °C [+ 176 °F]
RoHS-compliant	RoHS-3;6c

Electrical data


Current load capacity / rated current	2 A
Typical resistance (Ri)	<10 mOhm

Mechanical data

Total length	27.37 mm [1.07 in]
Barrel diameter	0.75 mm [.029 in]
Maximum stroke	1.1 mm [.043 in]
Collar height	.00
Spring force at working stroke	2 N [7.19 ozf]
Recommended working stroke	0.3 mm [.011 in]

Tip style data


Tip style	05 bullet-nosed (full radius)
Tip diameter	0.4 mm [.015 in]
Tip style surface	A gold
Tip style material	3 CuBe
Step probe tip height	1 mm [.039 in]

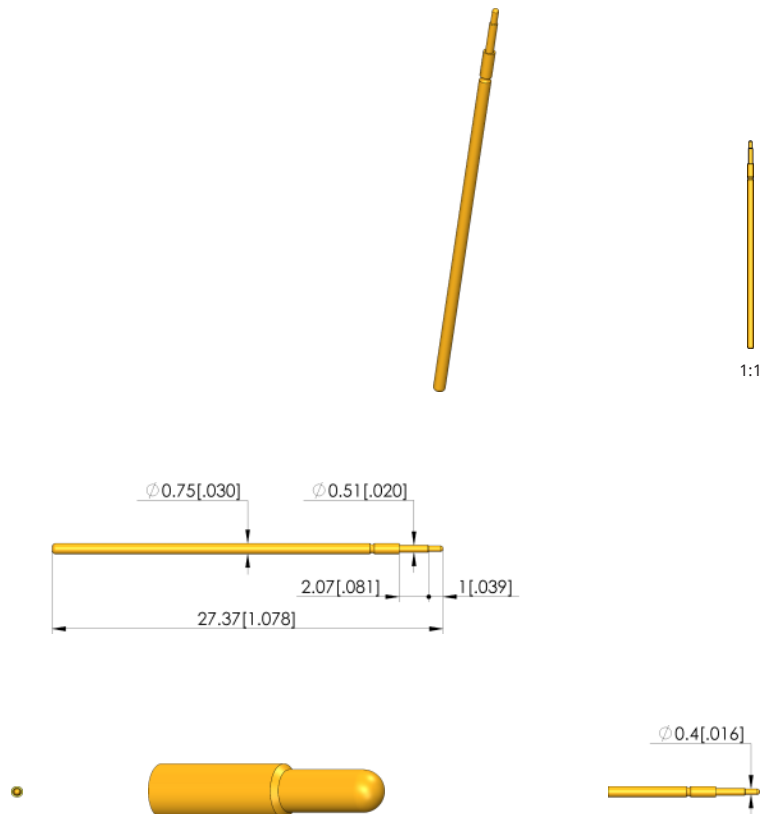

Spring-loaded test probe
GKS-051 305 040 A 2000 K3MM310
Item GKS-051-0116



ingun[®]
Partner for Future Technology

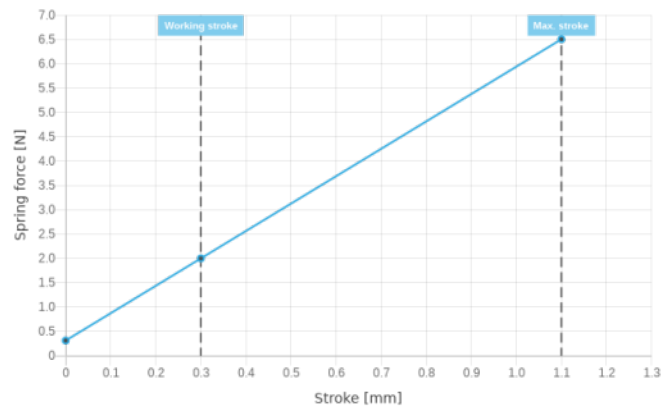

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 08/23 EN

Learn more about
Test probes

