

Spring-loaded test probe

GKS-061 304 035 A 0602

Item GKS-061-0001



ingun[®]

Partner for Future Technology

General data

Product group	ICT / FCT (in-circuit test and function test)
Sub-product group	Fine-pitch
Series	GKS-061
Grid	0.8 mm [31 mil]
Contacting from	Pad, Pin, Post
Magnetic	Yes
Installation type	Plug-in
Quick-exchange system	No
Type of test probe connection	Plug
Adjustable installation height	No
Non-rotating	No
Compatible connector(s)	SE-061
Min. temperature	- 40 °C [- 104 °F]
Max. temperature	+ 80 °C [+ 176 °F]
RoHS-compliant	RoHS-3;6c

Electrical data



Current load capacity / rated current	2 A
Typical resistance (Ri)	<50 mOhm

Mechanical data

Total length	36.2 mm [1.42 in]
Barrel diameter	0.5 mm [.019 in]
Maximum stroke	3.5 mm [.137 in]
Spring pre-load	0.4 N [1.43 ozf]
Collar height	0.2
Spring force at working stroke	0.6 N [2.15 ozf]
Recommended working stroke	2.5 mm [.098 in]

Tip style data

Tip style	04 4-point crown
Tip diameter	0.35 mm [.013 in]
Tip style surface	A gold
Tip style material	3 CuBe

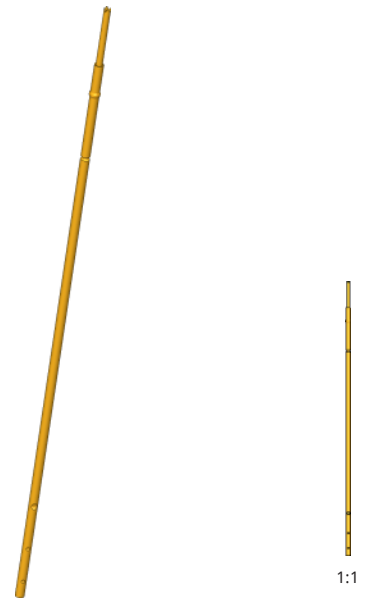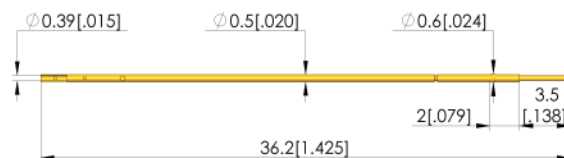

Spring-loaded test probe


GKS-061 304 035 A 0602

Item GKS-061-0001



ingun[®]

Partner for Future Technology

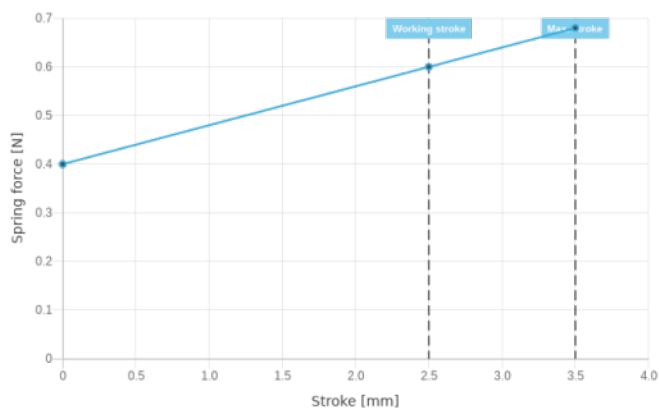

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 08/23 EN

Learn more about
ICT/FCT Test probes



ingun.com