

Spring-loaded test probe

GKS-098 329 300 R 1507

Item GKS-098-0001



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group	Screw-in test probe
Sub-product group	Non-rotating test probes
Series	GKS-098
Grid	4 mm [157 mil]
Contacting from	Female connector
Magnetic	Yes
Installation type	Plug-in
Quick-exchange system	Yes
Adjustable installation height	No
Non-rotating	Yes
Compatible receptacle(s)	KS-103, KS-103 23
Min. temperature	- 40 °C [- 104 °F]
Max. temperature	+ 80 °C [+ 176 °F]
RoHS-compliant	RoHS-3;6c

Electrical data


Current load capacity / rated current	10 A
Typical resistance (Ri)	<30 mOhm

Mechanical data

Total length	28.6 mm [1.12 in]
Barrel diameter	3 mm [.118 in]
Maximum stroke	5 mm [.196 in]
Spring pre-load	0.45 N [1.61 ozf]
Collar height	07
Spring force at working stroke	1.5 N [5.39 ozf]
Recommended working stroke	4 mm [.157 in]

Tip style data

Tip style	29 spade, flat with flat head
Tip diameter	3 mm [.118 in]
Tip style surface	R rhodium
Tip style material	3 CuBe
Spade width	0.7 mm [.027 in]
Spade length	6.5 mm [.255 in]

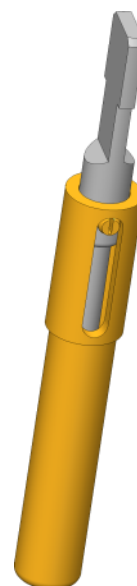

1:1

Spring-loaded test probe





GKS-098 329 300 R 1507

Item GKS-098-0001



ingun[®]

Partner for Future Technology

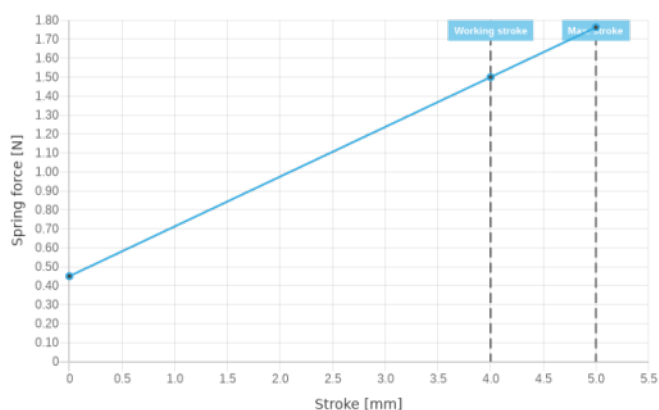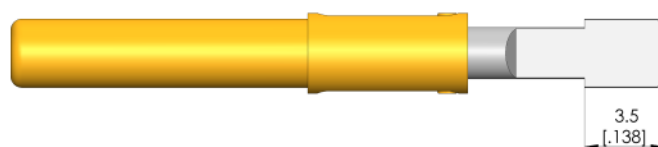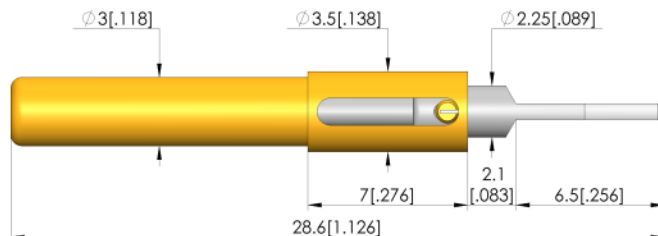

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 08/23 EN

Learn more about
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com