

Spring-loaded test probe

GKS-098 329 300 070 A 1502 ML

Item GKS-098-0005



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group	Screw-in test probe
Sub-product group	Non-rotating test probes
Series	GKS-098 ML screw-in
Grid	5.08 mm [200 mil]
Contacting from	Female connector
Magnetic	Yes
Installation type	Screw-in
Quick-exchange system	Yes
Adjustable installation height	No
Non-rotating	Yes
Screw-in torque	10 - 20 cNm [.885 - 1.77 lbf-in]
Compatible receptacle(s)	KS-098 M
Min. temperature	- 100 °C [- 212 °F]
Max. temperature	+ 200 °C [+ 392 °F]
RoHS-compliant	RoHS-3;6c

Electrical data


Current load capacity / rated current	10 A
Typical resistance (Ri)	<100 mOhm

Mechanical data

Total length	40 mm [1.57 in]
Barrel diameter	3 mm [.118 in]
Maximum stroke	5 mm [.196 in]
Spring pre-load	0.48 N [1.72 ozf]
Collar height	02
Spring force at working stroke	1.5 N [5.39 ozf]
Recommended working stroke	4 mm [.157 in]

Tip style data

Tip style	29 spade, flat with flat head
Tip diameter	3 mm [.118 in]
Tip style surface	A gold
Tip style material	3 CuBe
Spade width	0.7 mm [.027 in]
Spade length	6.5 mm [.255 in]



1:1





Spring-loaded test probe

GKS-098 329 300 070 A 1502 ML

Item GKS-098-0005



ingun[®]
Partner for Future Technology

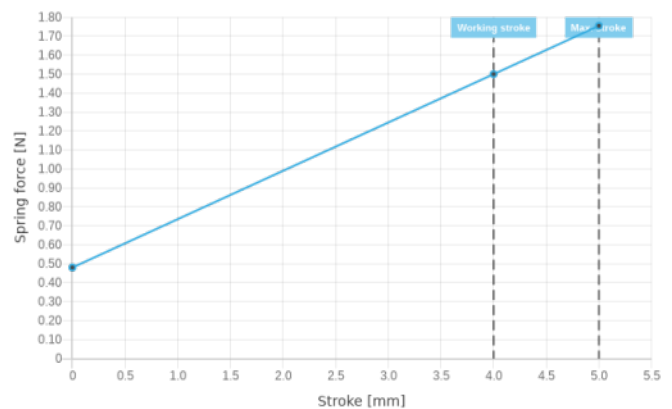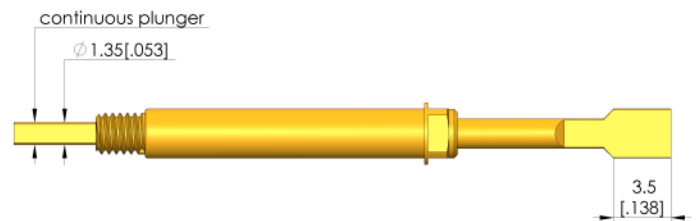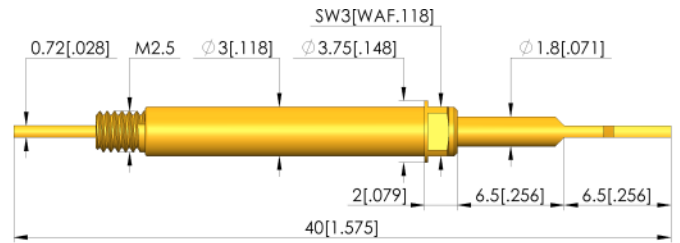

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 08/23 EN

Learn more about
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com