# GKS-112 207 200 R 2202 M

Item GKS-112-0745







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









## **General data**

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pad, via Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in]

Adjustable installation height:

No
Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature:

RoHS-compliant:

No
No
Non-rotating:

3 - 5 cNm [.265 - .442 lbf-in]

KS-112 M

KS-112 M

+ 40 °C [- 104 °F]

RoHS-3;6a;6c

## **Electrical data**

Current load capacity / rated current: 5 A
Typical resistance (Ri): <20 mOhm

#### **Mechanical data**

 Total length:
 35.8 mm [1.40 in]

 Barrel diameter:
 1.65 mm [.064 in]

 Maximum stroke:
 5.3 mm [.208 in]

 Spring pre-load:
 0.65 N [2.33 ozf]

 Collar height:
 02

 Spring force at working stroke:
 2.25 N [8.09 ozf]

 Recommended working stroke:
 4 mm [.157 in]

# Tip style data


Tip style: 07 90° 3-edged chisel, self-cleaning
Tip diameter: 2 mm [.078 in]
Tip style surface: R rhodium
Tip style material: 2 steel

# GKS-112 207 200 R 2202 M

Item GKS-112-0745





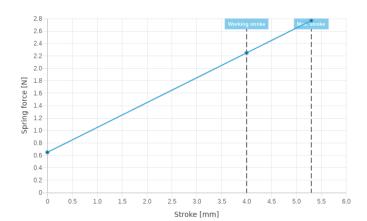

# **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com













Learn more about **ICT/FCT Test probes** 

