## Spring-loaded test probe

# GKS-112 302 150 A 0602 M

Item GKS-112-0915






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available







- 40 °C [- 104 °F]

+ 80 °C [+ 176 °F]

RoHS-3;6c



### **General data**

Min. temperature:

Max. temperature:

RoHS-compliant:

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in 2.54 mm [100 mil] Grid: Contacting from: Pin, Pfosten, Bead, Flachkontakt Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Non-rotating: Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-112 M

### **Electrical data**

Current load capacity / rated current: 5 A <20 mOhm Typical resistance (Ri):

### **Mechanical data**

Total length: 35.8 mm [1.40 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.2 N [.719 ozf] Collar height: Spring force at working stroke: 0.6 N [2.15 ozf] Recommended working stroke: 4 mm [.157 in]

### Tip style data

Tip style: 02 flat Tip diameter: 1.5 mm [.059 in] Tip style surface: A gold Tip style material: 3 CuBe

# ICT/FCT TEST PROBES


# Spring-loaded test probe

# GKS-112 302 150 A 0602 M

Item GKS-112-0915





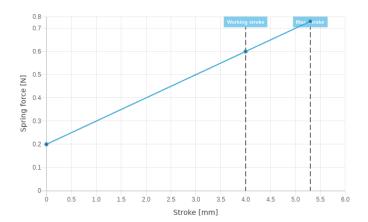

### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes** 

