Spring-loaded test probe

GKS-112 306 200 A 2202 M

Item GKS-112-1354







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available







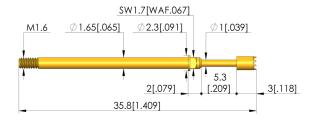



General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:

Screw-in torque: Compatible receptacle(s): Min. temperature:

Max. temperature: RoHS-compliant:

Non-rotating:

Screw-in test probe Screw-in test probe GKS-112 M screw-in 2.54 mm [100 mil] Pin, Post, Flat contact

Yes Screw-in Yes No No 3 - 5 cNm [.265 - .442 lbf·in]

> KS-112 M - 40 °C [- 104 °F] + 80 °C [+ 176 °F] RoHS-3;6c

Electrical data

Current load capacity / rated current: 8 A
Typical resistance (Ri): <20 mOhm

Mechanical data

 Total length:
 35.8 mm [1.40 in]

 Barrel diameter:
 1.65 mm [.064 in]

 Maximum stroke:
 5.3 mm [.208 in]

 Spring pre-load:
 0.65 N [2.33 ozf]

 Collar height:
 02

 Spring force at working stroke:
 2.25 N [8.09 ozf]

 Recommended working stroke:
 4 mm [.157 in]

Tip style data

Tip style:06 serratedTip diameter:2 mm [.078 in]Tip style surface:A goldTip style material:3 CuBe

ICT/FCT TEST PROBES


Spring-loaded test probe

GKS-112 306 200 A 2202 M

Item GKS-112-1354





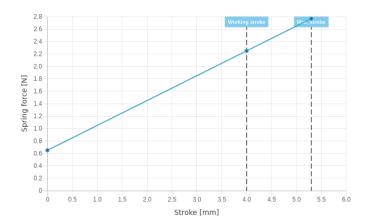

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes**

