# Spring-loaded test probe

### GKS-112 305 200 A 3002 MC

Item GKS-112-1386






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





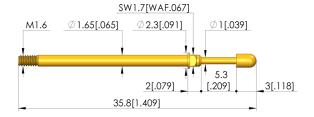



#### **General** data

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pad, Female connector Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Nο Non-rotating:

Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] KS-112 M Compatible receptacle(s): Min. temperature: - 100 °C [- 212 °F] + 200 °C [+ 392 °F] Max. temperature: RoHS-compliant: RoHS-3;6c

#### **Electrical data**

Current load capacity / rated current: 8 A Typical resistance (Ri): <100 mOhm

#### Mechanical data

Total length: 35.8 mm [1.40 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.9 N [3.23 ozf] Collar height: 02 Spring force at working stroke: 3 N [10.7 ozf] 4 mm [.157 in] Recommended working stroke:

#### Tip style data

Tip style: 05 bullet-nosed (full radius) Tip diameter: 2 mm [.078 in] A gold Tip style surface: Tip style material: 3 CuBe

# ICT/FCT TEST PROBES


# Spring-loaded test probe

# GKS-112 305 200 A 3002 MC

Item GKS-112-1386





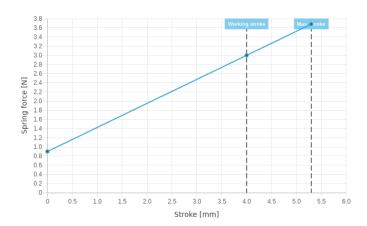

#### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes** 

