# Spring-loaded test probe

### GKS-112 302 080 A 1502 M

Item GKS-112-1549






**INGUN** SELECTION

- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









### **General data**

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in 2.54 mm [100 mil] Grid: Contacting from: Pin, Pfosten, Bead, Flachkontakt Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in]

Compatible receptacle(s): KS-112 M - 40 °C [- 104 °F] Min. temperature: Max. temperature: +80 °C [+176 °F] RoHS-compliant: RoHS-3;6c

### **Electrical data**

Current load capacity / rated current: 8 A <20 mOhm Typical resistance (Ri):

### Mechanical data

Total length: 35.8 mm [1.40 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 8 mm [.314 in] Spring pre-load: 0.5 N [1.79 ozf] Collar height: Spring force at working stroke: 1.5 N [5.39 ozf] Recommended working stroke: 4 mm [.157 in]

### Tip style data

Tip style: 02 flat Tip diameter: 0.8 mm [.031 in] Tip style surface: A gold Tip style material: 3 CuBe

# ICT/FCT TEST PROBES


# Spring-loaded test probe

## GKS-112 302 080 A 1502 M

Item GKS-112-1549





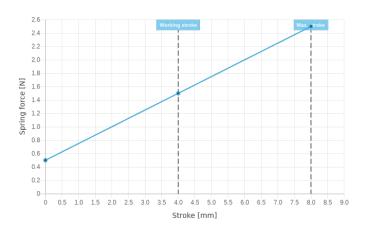

### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes** 

