

Spring-loaded test probe GKS-112 201 100 R 1510 M



Item GKS-112-1577



GO TO PRODUCT

ingun[®]

Partner for Future Technology

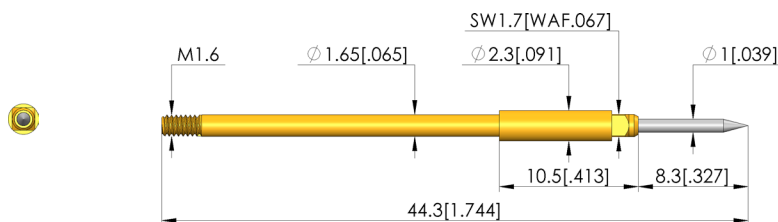

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Screw-in torque:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Screw-in test probe
Screw-in test probe
GKS-112 M screw-in
2.54 mm [100 mil]
Pad
Yes
Screw-in
Yes
No
No
3 - 5 cNm [.265 - .442 lbf-in]
KS-112 M
- 40 °C [- 104 °F]
+ 80 °C [+ 176 °F]
RoHS-3;6a;6c

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

5 A
<20 mOhm

Mechanical data

Total length: 44.3 mm [1.74 in]
Barrel diameter: 1.65 mm [.064 in]
Maximum stroke: 8 mm [.314 in]
Spring pre-load: 0.5 N [1.79 ozf]
Collar height: 10
Spring force at working stroke: 1.5 N [5.39 ozf]
Recommended working stroke: 4 mm [.157 in]

Tip style data

Tip style: 01 30° needle tip, self-cleaning
Tip diameter: 1 mm [.039 in]
Tip style surface: R rhodium
Tip style material: 2 steel

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.

Learn more about
ICT/FCT Test probes



ingun.com