Spring-loaded test probe


GKS-112 305 064 A 3002 MC

Item GKS-112-1669






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available

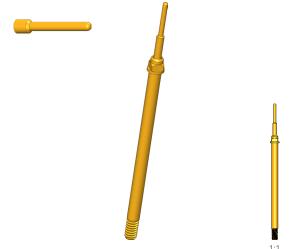



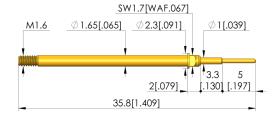



General data

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pad, Female connector Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Nο Non-rotating: Nο 3 - 5 cNm [.265 - .442 lbf·in] Screw-in torque:

 Non-rotating:
 No

 Screw-in torque:
 3 - 5 cNm [.265 - .442 lbf·in]

 Compatible receptacle(s):
 KS-112 M

 Min. temperature:
 - 100 °C [- 212 °F]

 Max. temperature:
 + 200 °C [+ 392 °F]

 RoHS-compliant:
 RoHS-3;6c

Electrical data

Current load capacity / rated current: 8 A
Typical resistance (Ri): <100 mOhm

Mechanical data

Total length: 35.8 mm [1.40 in]
Barrel diameter: 1.65 mm [.064 in]
Maximum stroke: 8 mm [.314 in]
Spring pre-load: 0.9 N [3.23 ozf]
Collar height: 02
Spring force at working stroke: 3 N [10.7 ozf]
Recommended working stroke: 4 mm [.157 in]

Tip style data

Tip style:

Tip style:

05 bullet-nosed (full radius)

Tip diameter:

0.64 mm [.025 in]

Tip style surface:

A gold

Tip style material:

3 CuBe

ICT/FCT TEST PROBES


Spring-loaded test probe

GKS-112 305 064 A 3002 MC

Item GKS-112-1669





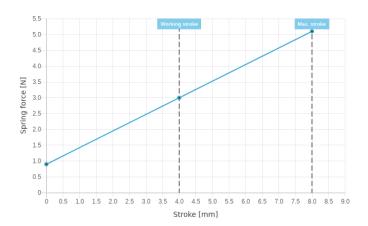

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes**

