Spring-loaded test probe

GKS-112 319 200 A 3002 MC

Item GKS-112-1782







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





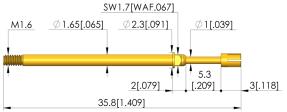



General data

Product group: Sub-product group:

Series: Grid:

Contacting from:

Magnetic:

Installation type: Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature: RoHS-compliant:

Screw-in test probe Screw-in test probe

GKS-112 M screw-in

Pin, posts

Yes Screw-in

Yes No

No

3 - 5 cNm [.265 - .442 lbf·in]

KS-112 M

- 100 °C [- 212 °F] + 200 °C [+ 392 °F]

RoHS-3;6c

Electrical data

Current load capacity / rated current:

Typical resistance (Ri):

2.54 mm [100 mil]

Barrel diameter:

Spring pre-load:

Spring force at working stroke:

Recommended working stroke:

8 A <100 mOhm

Mechanical data

Total length: 35.8 mm [1.40 in] 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in]

0.9 N [3.23 ozf] Collar height:

3 N [10.7 ozf] 4 mm [.157 in]

Tip style data

Tip style: 19 90° inverse cone, slotted, self cleaning Tip diameter: 2 mm [.078 in]

Tip style surface: A gold Tip style material: 3 CuBe

ICT/FCT TEST PROBES


Spring-loaded test probe

GKS-112 319 200 A 3002 MC

Item GKS-112-1782





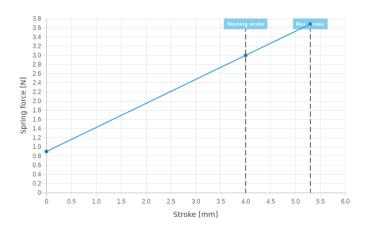

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes**

