Spring-loaded test probe

GKS-112 305 140 A 3005 M


Item GKS-112-1841






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available







General data

Product group: Sub-product group: Series: Grid: Contacting from: Pad, Female connector Magnetic: Installation type: Quick-exchange system: Adjustable installation height: Non-rotating:

Screw-in torque: Compatible receptacle(s): Min. temperature:

Max. temperature: RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-112 M screw-in 2.54 mm [100 mil]

Yes Screw-in Yes No No 3 - 5 cNm [.265 - .442 lbf·in]

> KS-112 M - 40 °C [- 104 °F] + 80 °C [+ 176 °F] RoHS-3;6c

Electrical data

Current load capacity / rated current: 8 A Typical resistance (Ri): <20 mOhm

Mechanical data

Total length: 38.8 mm [1.52 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.6 N [2.15 ozf] Collar height: Spring force at working stroke: 3 N [10.7 ozf] Recommended working stroke: 4 mm [.157 in]

Tip style data

Tip style: 05 bullet-nosed (full radius) Tip diameter: 1.4 mm [.055 in] Tip style surface: A gold Tip style material: 3 CuBe


Spring-loaded test probe

GKS-112 305 140 A 3005 M

Item GKS-112-1841





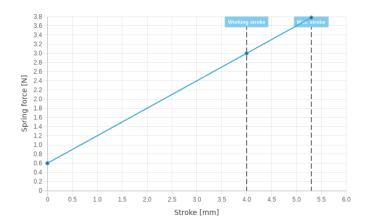

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com







Learn more about ICT/FCT Test probes

