# Spring-loaded test probe

## GKS-112 305 200 A 0810 MC

Item GKS-112-2120






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





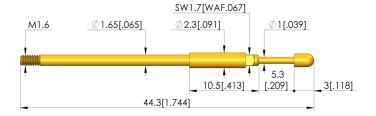



### **General data**

Product group: Sub-product group: Series: Grid: Contacting from: Magnetic:

Installation type: Quick-exchange system: Adjustable installation height: Non-rotating:

Screw-in torque: Compatible receptacle(s): Min. temperature:

Max. temperature: RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-112 M screw-in 2.54 mm [100 mil] Pad, Female connector

Screw-in Yes No No

3 - 5 cNm [.265 - .442 lbf·in] KS-112 M - 100 °C [- 212 °F] + 200 °C [+ 392 °F] RoHS-3;6c

### **Electrical data**

Current load capacity / rated current: 5 A Typical resistance (Ri): <100 mOhm

### Mechanical data

Total length: 44.3 mm [1.74 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.24 N [.863 ozf] Collar height: Spring force at working stroke: 0.8 N [2.87 ozf] Recommended working stroke: 4 mm [.157 in]

### Tip style data

Tip style: 05 bullet-nosed (full radius) 2 mm [.078 in] Tip diameter: A gold Tip style surface: Tip style material: 3 CuBe

# ICT/FCT TEST PROBES


# Spring-loaded test probe

# GKS-112 305 200 A 0810 MC

Item GKS-112-2120





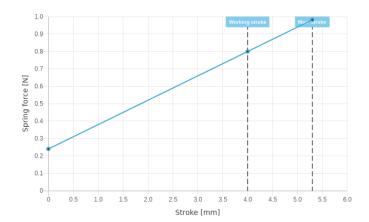

### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com







Learn more about **ICT/FCT Test probes** 

