# Spring-loaded test probe

### GKS-112 319 180 A 1510 M

Item GKS-112-2216







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









#### **General data**

Product group: Sub-product group:

Series: Grid:

Contacting from: Magnetic: Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s): Min. temperature:

Max. temperature: RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-112 M screw-in 2.54 mm [100 mil]

Pin, posts Yes Screw-in Yes

No 3 - 5 cNm [.265 - .442 lbf·in]

KS-112 M - 40 °C [- 104 °F] + 80 °C [+ 176 °F]

RoHS-3;6c

#### **Electrical data**

Current load capacity / rated current: 8 A Typical resistance (Ri): <20 mOhm

#### **Mechanical data**

Total length: 44.3 mm [1.74 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.5 N [1.79 ozf] Collar height: 10 Spring force at working stroke: 1.5 N [5.39 ozf] Recommended working stroke: 4 mm [.157 in]

#### Tip style data

Tip style: 19 90° inverse cone, slotted, self cleaning Tip diameter: 1.8 mm [.070 in] Tip style surface: A gold Tip style material: 3 CuBe

# ICT/FCT TEST PROBES


# Spring-loaded test probe

## GKS-112 319 180 A 1510 M

Item GKS-112-2216





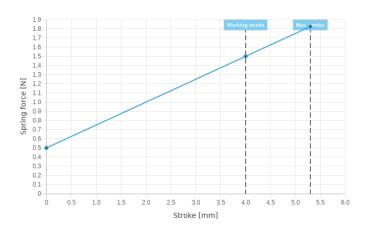

#### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes** 

