Spring-loaded test probe


GKS-112 217 200 R 2202 MC




- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









General data

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pad, Via, Female connector Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Nο Non-rotating: No 3 - 5 cNm [.265 - .442 lbf·in] Screw-in torque:

Compatible receptacle(s): KS-112 M Min. temperature: - 100 °C [- 212 °F] Max. temperature: + 200 °C [+ 392 °F] RoHS-compliant: RoHS-3;6a;6c

Electrical data

Current load capacity / rated current: 5 A <100 mOhm Typical resistance (Ri):

Mechanical data

Total length: 35.8 mm [1.40 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] 0.61 N [2.19 ozf] Spring pre-load: Collar height: 02 2.25 N [8.09 ozf] Spring force at working stroke: Recommended working stroke: 4 mm [.157 in]

Tip style data

Tip style: 17 hexagonal pyramid with cutting edges, self-cleaning 2 mm [.078 in] Tip diameter: R rhodium Tip style surface: Tip style material: 2 steel

ICT/FCT TEST PROBES


Spring-loaded test probe

GKS-112 217 200 R 2202 MC

Item GKS-112-2246





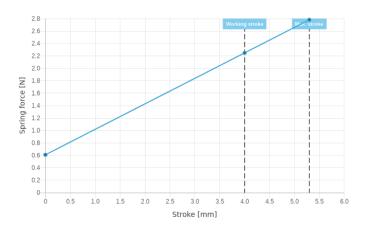

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com







Learn more about **ICT/FCT Test probes**

