# Spring-loaded test probe

## GKS-112 217 175 N 5005 M

Item GKS-112-2519







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





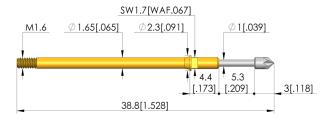



#### **General data**

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pad, Via, Female connector Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-112 M Min. temperature: - 40 °C [- 104 °F] Max. temperature: + 80 °C [+ 176 °F] RoHS-compliant: RoHS-3;6a;6c

#### **Electrical data**

Current load capacity / rated current: 5 A Typical resistance (Ri): <20 mOhm

## Mechanical data

Total length: 38.8 mm [1.52 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] 1.49 N [5.35 ozf] Spring pre-load: Collar height: Spring force at working stroke: 5 N [17.9 ozf] Recommended working stroke: 4 mm [.157 in]

### Tip style data


Tip style: 17 hexagonal pyramid with cutting edges, self-cleaning Tip diameter: 1.75 mm [.068 in] Tip style surface: N nickel Tip style material: 2 steel

# Spring-loaded test probe

# GKS-112 217 175 N 5005 M

Item GKS-112-2519



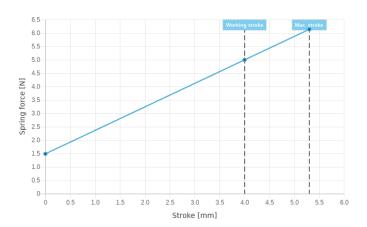

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes**  ICT/FCT TEST PROBES

