Spring-loaded test probe

GKS-112 217 200 R 3005 M

Item GKS-112-2862






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available








+ 80 °C [+ 176 °F]

RoHS-3;6a;6c



General data

Max. temperature:

RoHS-compliant:

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-112 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pad, Via, Female connector Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-112 M Min. temperature: - 40 °C [- 104 °F]

Electrical data

Current load capacity / rated current: 5 A Typical resistance (Ri): <20 mOhm

Mechanical data

Total length: 38.8 mm [1.52 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.6 N [2.15 ozf] Collar height: Spring force at working stroke: 3 N [10.7 ozf] Recommended working stroke: 4 mm [.157 in]


Tip style data

Tip style: 17 hexagonal pyramid with cutting edges, self-cleaning Tip diameter: 2 mm [.078 in] Tip style surface: R rhodium Tip style material: 2 steel

Spring-loaded test probe GKS-112 217 200 R 3005 M

Item GKS-112-2862



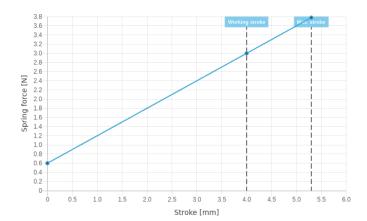

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com







Learn more about **ICT/FCT Test probes**

