Spring-loaded test probe

GKS-113 306 230 R 2202 M

Item GKS-113-0413







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





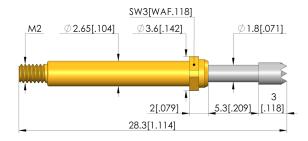



General data

Product group: Sub-product group: Series:

Grid:

Contacting from:

Magnetic:

Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature:

RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-113 M screw-in 4 mm [157 mil] Pin, Post, Flat contact

> Yes Screw-in

Yes No

10 - 20 cNm [.885 - 1.77 lbf·in]

KS-113 M - 40 °C [- 104 °F]

+ 80 °C [+ 176 °F] RoHS-3;6c **Electrical data**

Current load capacity / rated current:

Typical resistance (Ri):

Mechanical data

Total length: Barrel diameter: Maximum stroke: Spring pre-load:

Collar height:

Spring force at working stroke: Recommended working stroke:

Tip style data

Tip style: Tip diameter: Tip style surface:

Tip style material:

8 A <30 mOhm

28.3 mm [1.11 in] 2.65 mm [.104 in] 5.3 mm [.208 in] 0.75 N [2.69 ozf]

> 2.25 N [8.09 ozf] 4 mm [.157 in]

06 serrated 2.3 mm [.090 in] R rhodium 3 CuBe

SCREW-IN TEST PROBE


Spring-loaded test probe

GKS-113 306 230 R 2202 M

Item GKS-113-0413





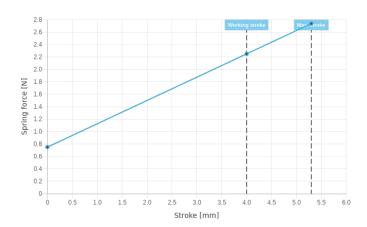

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

