Test Probe

GKS-113 204 230 R 5002 M


Item GKS-113-0585




- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









General data

Product group: Sub-product group: Series:

Series.

Grid:

Contacting from: Magnetic: Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature: Max. temperature:

RoHS-compliant:

28.3[1.114]

Screw-in test probe
Screw-in test probe
GKS-113 M screw-in
4 mm [157 mil]

Pad, pin, posts Yes

Screw-in Yes No

10 - 20 cNm [.885 - 1.77 lbf·in]

KS-113 M

- 40 °C [- 104 °F]

+ 80 °C [+ 176 °F] RoHS-3;6a;6c

Electrical data

Current load capacity / rated current: Typical resistance (Ri):

Mechanical data

Total length: Barrel diameter: Maximum stroke:

Spring pre-load: Collar height:

Spring force at working stroke:

Recommended working stroke:

Tip style data

Tip style: Tip diameter:

Tip style surface: Tip style material: 5 A

5 A <30 mOhm

28.3 mm [1.11 in] 2.65 mm [.104 in] 5.3 mm [.208 in] 1.36 N [4.89 ozf]

> 5 N [17.9 ozf] 4 mm [.157 in]


04 4-point crown 2.3 mm [.090 in] R rhodium 2 steel

GKS-113 204 230 R 5002 M

Item GKS-113-0585





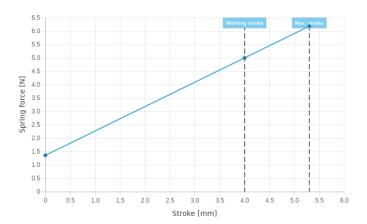

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

