## **Test Probe**

## GKS-113 302 400 A 2202 M

Item GKS-113-0747






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









#### **General data**

Product group: Sub-product group:

Series: Grid:

Contacting from:

Magnetic:

Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature: RoHS-compliant:

Screw-in test probe Screw-in test probe

GKS-113 M screw-in 4.5 mm [177 mil]

Pin, Pfosten, Bead, Flachkontakt

Yes

Screw-in

Yes

No

No

10 - 20 cNm [.885 - 1.77 lbf·in]

KS-113 M - 40 °C [- 104 °F]

+ 80 °C [+ 176 °F]

RoHS-3;6c

#### **Electrical data**

Current load capacity / rated current:

Typical resistance (Ri):

Mechanical data

Total length: Barrel diameter:

Maximum stroke:

Spring pre-load:

Collar height:

Spring force at working stroke:

Recommended working stroke:

#### Tip style data

Tip style:

Tip diameter:

Tip style surface:

Tip style material:

8 A

<30 mOhm

28.3 mm [1.11 in]

2.65 mm [.104 in]

5.3 mm [.208 in]

0.75 N [2.69 ozf]

2.25 N [8.09 ozf]

4 mm [.157 in]

02 flat 4 mm [.157 in] A gold


3 CuBe

# GKS-113 302 400 A 2202 M

Item GKS-113-0747





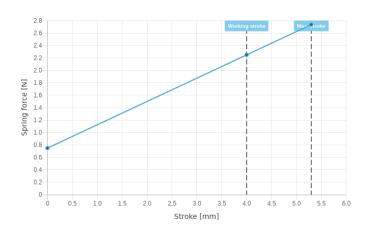

### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

