Spring-loaded test probe

GKS-113 355 300 R 0602 M

Item GKS-113-0942






- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









General data

Product group: Sub-product group:

Series:

Grid:

Contacting from:

Magnetic:

Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature:

RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-113 M screw-in 4 mm [157 mil]

Pad, Female connector

Yes

Screw-in

Yes No

10 - 20 cNm [.885 - 1.77 lbf·in]

KS-113 M

- 40 °C [- 104 °F] + 80 °C [+ 176 °F]

RoHS-3;6c

Electrical data

Current load capacity / rated current:

Typical resistance (Ri):

Mechanical data

Total length: Barrel diameter:

Maximum stroke:

Spring pre-load:

Collar height:

Spring force at working stroke:

Recommended working stroke:

Tip style data

Tip style:

Tip diameter:

Tip style surface:

Tip style material:

5 A

<30 mOhm

29.3 mm [1.15 in] 2.65 mm [.104 in] 5.3 mm [.208 in] 0.21 N [.755 ozf] 02

> 0.6 N [2.15 ozf] 4 mm [.157 in]


55 bullet-nosed, special length 3 mm [.118 in] R rhodium 3 CuBe

Partner for Future Technology

Spring-loaded test probe GKS-113 355 300 R 0602 M

Item GKS-113-0942



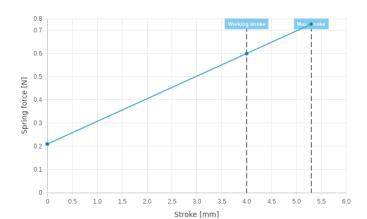

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe SCREW-IN TEST PROBE

