## Spring-loaded test probe

# GKS-113 217 300 A 0602 M

Item GKS-113-1547







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





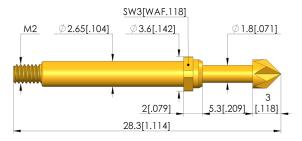



### **General** data

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-113 M screw-in Grid: 4 mm [157 mil] Contacting from: Pad, Via, Female connector Magnetic: Yes

Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No 10 - 20 cNm [.885 - 1.77 lbf·in] Screw-in torque: Compatible receptacle(s): KS-113 M

Min. temperature: - 40 °C [- 104 °F] Max. temperature: + 80 °C [+ 176 °F] RoHS-compliant: RoHS-3;6a;6c

### **Electrical data**

Current load capacity / rated current: 5 A Typical resistance (Ri): <30 mOhm

### Mechanical data

Total length: 28.3 mm [1.11 in] Barrel diameter: 2.65 mm [.104 in] Maximum stroke: 5.3 mm [.208 in] Spring pre-load: 0.2 N [.719 ozf] Collar height: 02 Spring force at working stroke: 0.6 N [2.15 ozf] Recommended working stroke: 4 mm [.157 in]

### Tip style data

Tip style: 17 hexagonal pyramid with cutting edges, self-cleaning Tip diameter: 3 mm [.118 in] Tip style surface: A gold 2 steel Tip style material:

# SCREW-IN TEST PROBE


# Spring-loaded test probe

# GKS-113 217 300 A 0602 M

Item GKS-113-1547





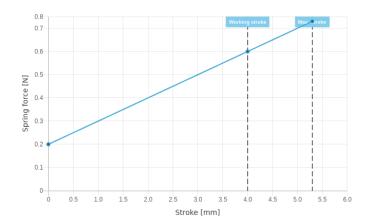

### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

