Spring-loaded test probe

GKS-427 306 200 A 1502 M

Item GKS-427-0001






- Short-stroke screw-in test probes for applications with possible vibrations or unwanted lateral and axial forces (migration of the test probes out of the receptacles is safely prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available










+80 °C [+176 °F]

RoHS-3;6c



General data

Max. temperature:

RoHS-compliant:

Product group: Screw-in test probe Sub-product group: Screw-in test probe Series: GKS-427 M screw-in Grid: 2.54 mm [100 mil] Contacting from: Pin, Post, Flat contact Magnetic: Yes Installation type: Screw-in Quick-exchange system: Yes Adjustable installation height: Nο Non-rotating: No Screw-in torque: 3 - 5 cNm [.265 - .442 lbf·in] Compatible receptacle(s): KS-427 M - 40 °C [- 104 °F] Min. temperature:

Electrical data

Current load capacity / rated current: 8 A Typical resistance (Ri): <20 mOhm

Mechanical data

Total length: 19.5 mm [.767 in] Barrel diameter: 1.65 mm [.064 in] Maximum stroke: 4.5 mm [.177 in] 0.25 N [.899 ozf] Spring pre-load: Collar height: 02 1.5 N [5.39 ozf] Spring force at working stroke: Recommended working stroke: 3.5 mm [.137 in]

Spring-loaded test probe

GKS-427 306 200 A 1502 M


Item GKS-427-0001





Tip style data

Tip style: 06 serrated Tip diameter: 2 mm [.078 in] Tip style surface: A gold Tip style material: 3 CuBe

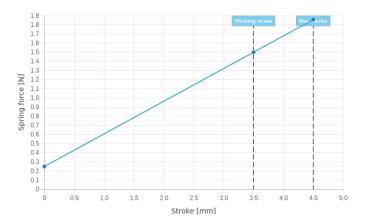

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

