## Spring-loaded test probe

# GKS-427 305 100 A 1502 MC

Item GKS-427-0040






- Short-stroke screw-in test probes for applications with possible vibrations or unwanted lateral and axial forces (migration of the test probes out of the receptacles is safely prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available









## **General data**

Product group: Sub-product group: Series:

Grid:

Contacting from:

Magnetic:

Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Screw-in torque:

Compatible receptacle(s):

Min. temperature:

Max. temperature:

RoHS-compliant:

Screw-in test probe Screw-in test probe GKS-427 M screw-in

2.54 mm [100 mil]

Pad, Female connector

Yes

Screw-in

Yes

No

3 - 5 cNm [.265 - .442 lbf·in] KS-427 M

- 100 °C [- 212 °F]

+ 200 °C [+ 392 °F]

RoHS-3;6c

## **Electrical data**

Current load capacity / rated current:

Typical resistance (Ri):

**Mechanical data** 

Total length:

Barrel diameter:

Maximum stroke:

Spring pre-load:

Collar height:

Spring force at working stroke:

Recommended working stroke:

Tip style data

Tip style:

Tip diameter:

Tip style surface:

Tip style material:

8 A

<100 mOhm

19.5 mm [.767 in] 1.65 mm [.064 in] 4.5 mm [.177 in] 0.41 N [1.47 ozf]

> 1.5 N [5.39 ozf] 3.5 mm [.137 in]

05 bullet-nosed (full radius) 1 mm [.039 in] A gold

3 CuBe

# **SCREW-IN TEST PROBE**


# Spring-loaded test probe

# GKS-427 305 100 A 1502 MC

Item GKS-427-0040





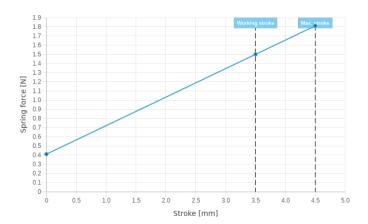

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

