

# Spring-loaded test probe GKS-747 329 408 A 1502 M

Item GKS-747-0003





GO TO PRODUCT

# ingun®

Partner for Future Technology



1:1

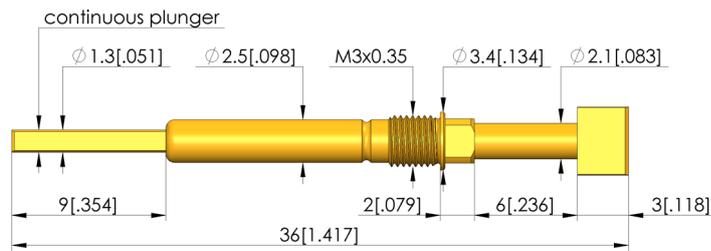

SCREW-IN TEST PROBE

# Spring-loaded test probe

## GKS-747 329 408 A 1502 M

Item GKS-747-0003



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### General data

Product group:	Screw-in test probe
Sub-product group:	Non-rotating test probes
Series:	GKS-747 M screw-in
Grid:	4.5 mm [177 mil]
Contacting from:	Female connector
Magnetic:	Yes
Installation type:	Screw-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	Yes
Continuous plunger:	∅1,3 x 0,7 x 9,0
Screw-in torque:	10 - 20 cNm [.885 - 1.77 lbf·in]
Compatible receptacle(s):	KS-747 M
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

### Electrical data


Current load capacity / rated current:	8 A
Typical resistance (Ri):	<30 mOhm

### Mechanical data

Total length:	36 mm [1.41 in]
Barrel diameter:	2.5 mm [.098 in]
Maximum stroke:	5 mm [.196 in]
Spring pre-load:	0.72 N [2.58 ozf]
Collar height:	02
Spring force at working stroke:	1.5 N [5.39 ozf]
Recommended working stroke:	4 mm [.157 in]

### Tip style data

Tip style:	29 spade, flat with flat head
Tip diameter:	4 mm [.157 in]
Tip style surface:	A gold
Tip style material:	3 CuBe
Spade width:	0.8 mm [.031 in]
Spade length:	3 mm [.118 in]

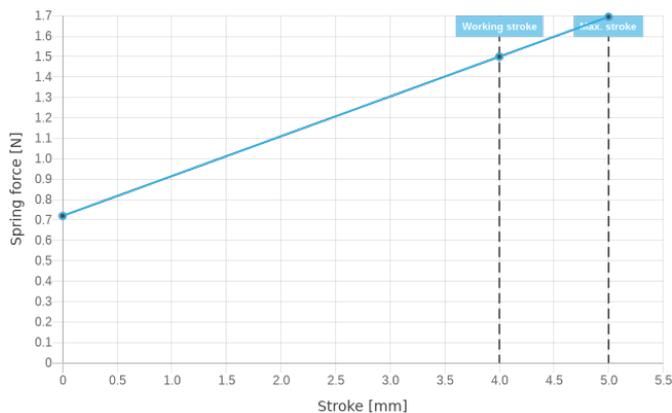

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/24\_GB

Learn more about  
Screw-in test probe



ingun.com