

Spring-loaded test probe

GKS-945 301 106 A 1300

Item GKS-945-0004






GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Test probes for the construction of interfaces for reliable signal transmission
- Interface test probes are available for all interfaces from popular test system suppliers

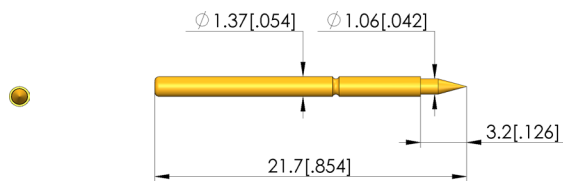

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Accessories (GKS / ADA)
Interface block probes
GKS-945
2.54 mm [100 mil]
Pad
Yes
Plug-in
Yes
No
No
KS-945
- 40 °C [- 104 °F]
+ 80 °C [+ 176 °F]
RoHS-3;6c

Electrical data

Current load capacity / rated current: 5 A
Typical resistance (Ri): <20 mOhm

Mechanical data

Total length: 21.7 mm [.854 in]
Barrel diameter: 1.37 mm [.053 in]
Maximum stroke: 3.2 mm [.125 in]
Spring pre-load: 0.6 N [2.15 ozf]
Collar height: 00
Spring force at working stroke: 1.3 N [4.67 ozf]
Recommended working stroke: 2.1 mm [.082 in]

Tip style data

Tip style: 01 30° needle tip, self-cleaning
Tip diameter: 1.06 mm [.041 in]
Tip style surface: A gold
Tip style material: 3 CuBe

Spring-loaded test probe


GKS-945 301 106 A 1300

Item GKS-945-0004



ingun[®]

Partner for Future Technology

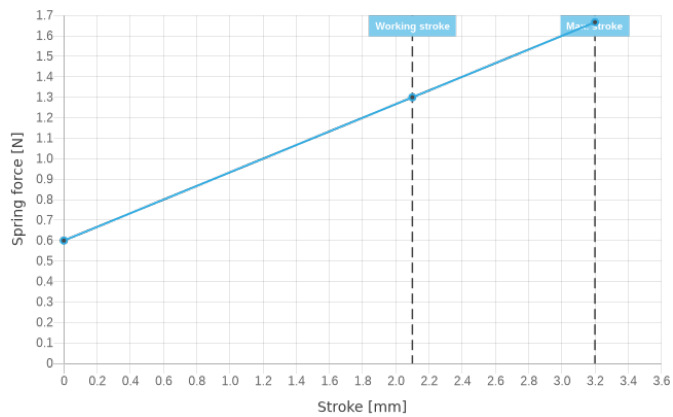

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 04/24_GB

Learn more about
Test probes

