

Spring-loaded test probe

GKS-986 105 130 A 1001


Item GKS-986-0001



GO TO PRODUCT

ingun[®]

Partner for Future Technology

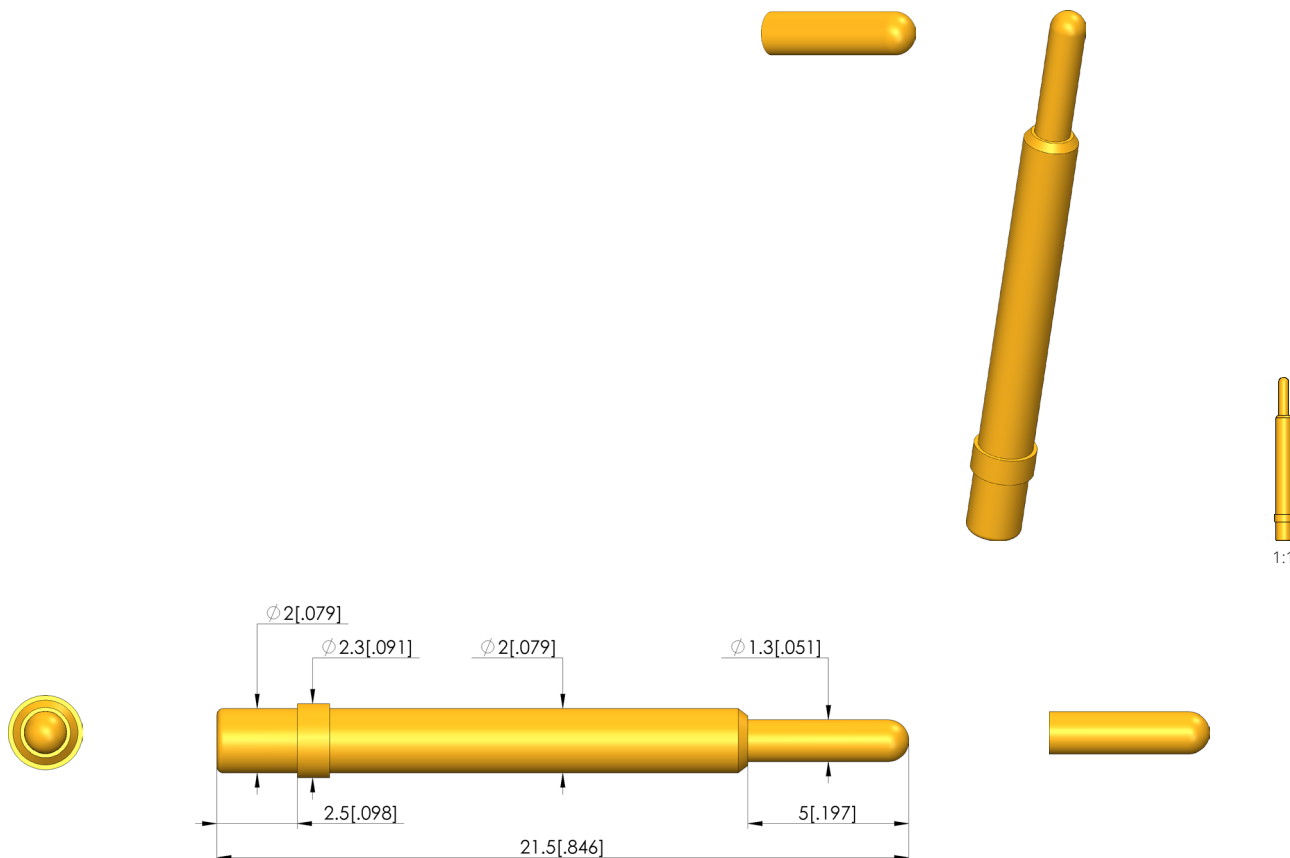

General data

Product group:	Assorted test probes
Sub-product group:	Solderable test probe
Series:	GKS-986
Grid:	2.54 mm [100 mil]
Contacting from:	Pad, Female connector
Magnetic:	Yes
Installation type:	Solderable
Quick-exchange system:	No
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

Mechanical data

Total length:	21.5 mm [.846 in]
Barrel diameter:	2 mm [.078 in]
Maximum stroke:	5 mm [.196 in]
Spring pre-load:	0.4 N [1.43 ozf]
Collar height:	01
Spring force at working stroke:	1 N [3.59 ozf]
Recommended working stroke:	3 mm [.118 in]

Tip style data

Tip style:	05 bullet-nosed (full radius)
Tip diameter:	1.3 mm [.051 in]
Tip style surface:	A gold
Tip style material:	1 brass

Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	<100 mOhm

Spring-loaded test probe

GKS-986 105 130 A 1001


Item GKS-986-0001



GO TO PRODUCT

ingun®

Partner for Future Technology

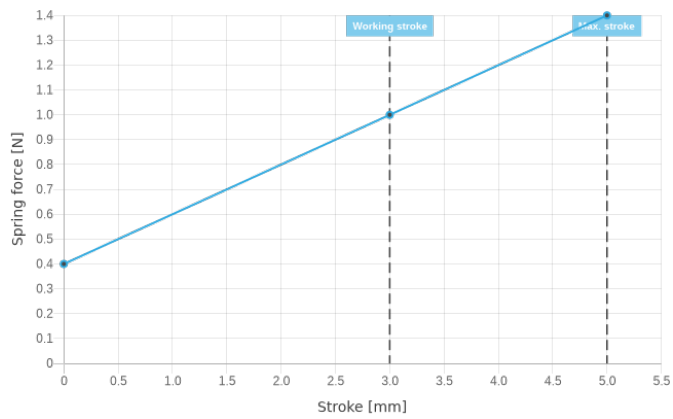

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 04/24_GB

Learn more about
Test probes

