


5	6	7
FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

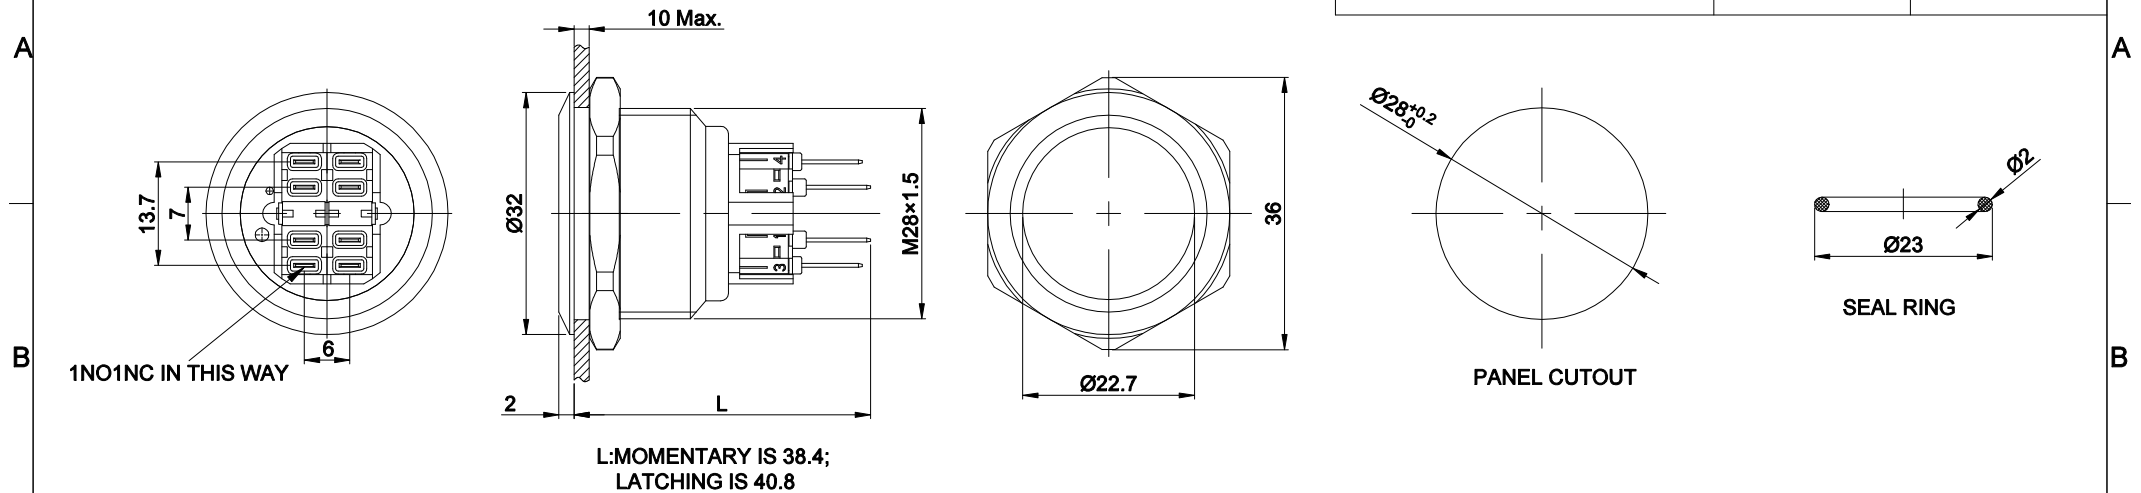

PART NUMBER:GQ28-□■/S

	CONTACT STRUCTURE		OPERATION MODE
11	1NO1NC	NO LETTER	MOMENTARY
22	2NO2NC	Z	LATCHING

SPECIFICATIONS:

- 1.SWITCH RATING: Ui:250V, Ith:5A.
- 2.MECHANICAL LIFE: $\geq 1,000,000$ cycles.
- 3.ELECTRICAL LIFE: $\geq 50,000$ cycles.
- 4.CONTACT RESISTANCE: $\leq 50\text{m}\Omega$.
- 5.INSULATION RESISTANCE: $\geq 100\text{M}\Omega(500\text{VDC})$.
- 6.POWER-FREQUENCY WITHSTAND VOLTAGE:1,500V, RMS 50HZ, 1min.
- 7.OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$ (NO FREEZING,KEEP THE AIR FLOWING AROUND PUSHBUTTON).
- 8.OPERATING FORCE: ABOUT 4N(1NO1NC), ABOUT 7.5N(2NO2NC).
- 9.OPERATING TRAVEL: ABOUT 2.5mm.
- 10.TORQUE: ABOUT 1.2N·m APPLIED TO NUT.
- 11.FRONT PANEL PROTECTION DEGREE: IP65(IP67 MOMENTARY CAN BE CUSTOMIZED);IK10.
- 12.TERMINAL TYPE: PIN TERMINAL(2.8 X 0.5mm).
- 13.GENERAL TOLERANCE:0-18mm= ± 0.25 , 18-80mm= ± 0.52 .
- 14.COMPLIANT WITH RoHS.

MATERIALS:

- 1.CONTACT: SILVER ALLOY.
2.BUTTON: STAINLESS STEEL.
3.BODY: STAINLESS STEEL.
4.BASE: PA.

BRAND 品牌		红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.							
ONPOW 欧宝龙®									
TITLE 名称		GQ SERIES ANTI-VANDAL PUSH BUTTON				UNIT 单位	mm		
DWG NO. 图号		GQ28不带灯		SCALE 比例		1 : 1	SIZE 图纸	A4	
FILE NAME 档案名称		GQ28不带灯 _DWG		DRAWN 制图		CRL 2022/12/14		SHEET 张	1/1
				REV. 更改		1			