

# Radio-frequency probe

## HFS-840 201 051 A 5306 M

Item HFS-840-0583




GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

- Long standard series
- Up to 4 GHz
- Cable interface MCX
- Screw-in version
- Receptacles: KS-810 M5-R, KS-810 M5-F

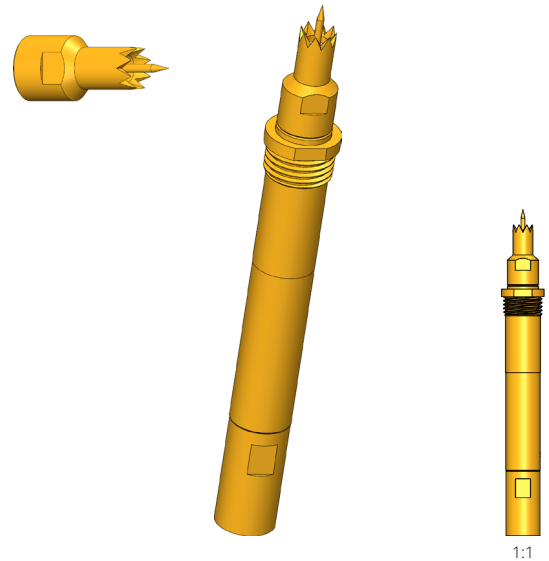

1:1

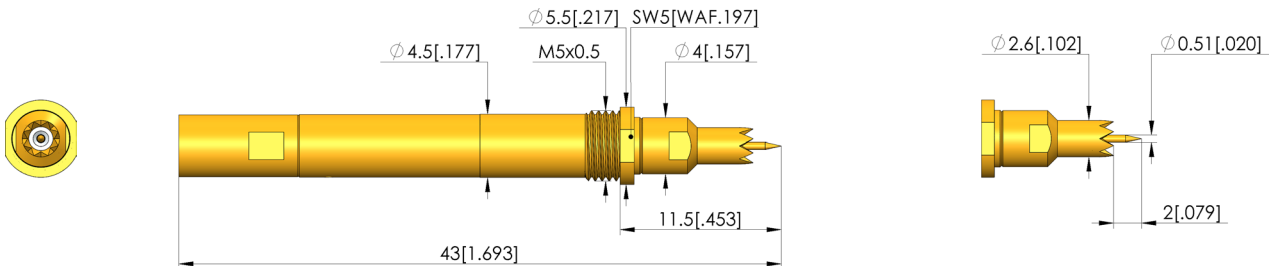

### General data

Product group:	HFS radio-frequency test probes
Series:	HFS-840
Sub-series:	HFS-840 M screw-in
Grid:	6.5 mm [255 mil]
DUT / contact:	PCB coax, closed
Installation type:	Screw-in
Floating mount:	No
Non-rotating:	Yes
Continuous plunger:	Yes
Interface of compatible assembly:	MCX 50 Ohm
Compatible assembly interface gender :	M signal conductor male / pin
KS sub-series:	KS-810 M, screw-in version
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6a;6c

### Outer conductor data

Outer conductor tip style:	06 serrated
Outer conductor tip style diameter:	2.6 mm [.102 in]
Spring force of entire outer conductor at working stroke:	4 N [14.3 ozf]
Outer conductor working stroke:	4 mm [.157 in]
Outer conductor maximum stroke:	5 mm [.196 in]
Exchangeable outer conductor:	KO-810-0156
Outer conductor max. current load capacity:	10 A

### Inner conductor data

Inner conductor tip style:	01 30° needle tip, self-cleaning
Inner conductor tip style diameter:	0.51 mm [.020 in]
Inner conductor tip style material:	2 steel
Inner conductor tip style surface:	A gold
Number of inner conductors:	1
Exchangeable inner conductor:	GKS-051-0001
Inner conductor working stroke:	2 mm [.078 in]
Spring force of each inner conductor at working stroke:	1.3 N [4.67 ozf]
Inner conductor maximum stroke:	3.7 mm [.145 in]
Inner conductor max. current load capacity:	2 A

RADIO-FREQUENCY TEST PROBES

# Radio-frequency probe

## HFS-840 201 051 A 5306 M

Item HFS-840-0583



**ingun**<sup>®</sup>  
Partner for Future Technology

### Electrical data

Frequency range up to:  
Impedance:

4 GHz  
50 Ohm

### Mechanical data

Total spring force at working stroke:	5.3 N [19.0 ozf]
Total length:	43 mm [1.69 in]
Barrel diameter:	4.5 mm [.177 in]
Installation height without receptacle:	11.5 mm [.452 in]
Torque in receptacle:	10 - 20 cNm [.885 - 1.77 lbf·in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/24\_GB

Learn more about  
Radio-frequency test probes



ingun.com

RADIO-FREQUENCY TEST PROBES