

# Radio-frequency probe

## HFS-856 308 110 A 6342 E1F-H

Item HFS-856-0021



**ingun**<sup>®</sup>




Partner for Future Technology

- For contacting plug connectors, micro-connectors micro-switches
- Up to 12 GHz
- Cable interface SMA
- Installation via flange mounting

UTILITY  
MODEL

PATENT  
PENDING

5G  
READY

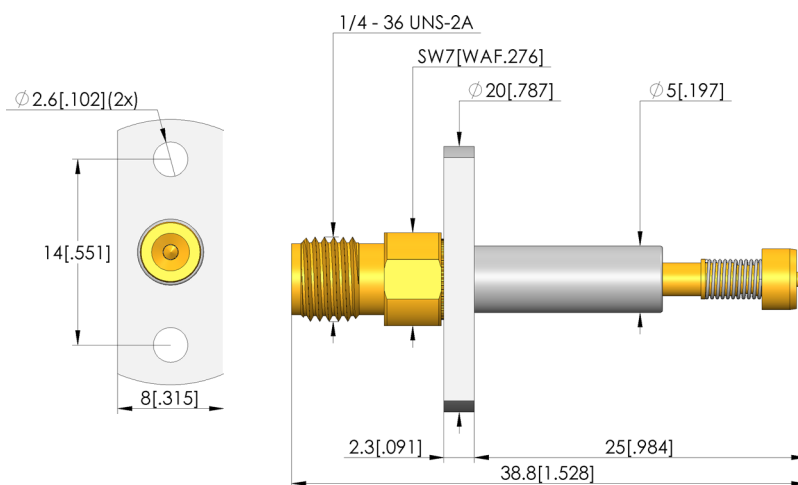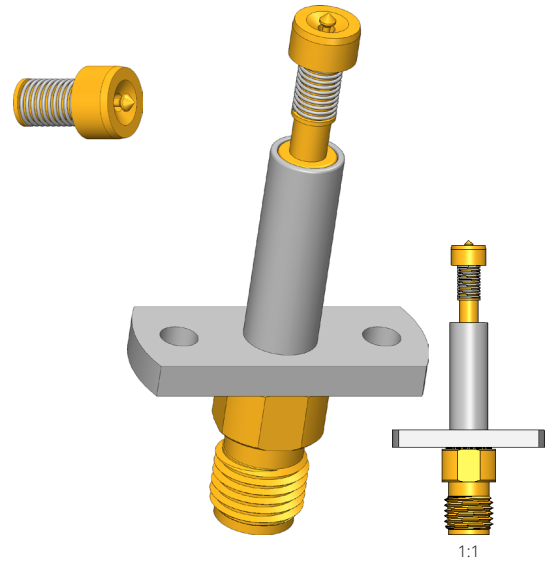

# Radio-frequency probe

## HFS-856 308 110 A 6342 E1F-H

Item HFS-856-0021



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### General data

Product group:	HFS radio-frequency test probes
Series:	HFS-856
Sub-series:	HFS-856
Grid:	10 mm [393 mil]
DUT / contact:	SMA
Installation type:	Flange
DUT interface gender :	F signal conductor female / socket
Floating mount:	Yes
Non-rotating:	No
Continuous plunger:	Yes
Interface of compatible assembly:	SMA 50 Ohm
Compatible assembly interface gender :	M signal conductor male / pin
Recommended torque at interface:	45 cNm [3.98 lbf·in]
Min. temperature:	- 40 °C [- 104 °F]
Max. temperature:	+ 80 °C [+ 176 °F]
RoHS-compliant:	RoHS-3;6c

### Outer conductor data

Outer conductor tip style:	42 centring for inner side of plug connector
Outer conductor tip style diameter:	4.59 mm [.180 in]
Spring force of entire outer conductor at working stroke:	4.8 N [17.2 ozf]
Outer conductor working stroke:	4.2 mm [.165 in]
Outer conductor maximum stroke:	5.2 mm [.204 in]
Exchangeable outer conductor:	No
Outer conductor max. current load capacity:	3 A

### Inner conductor data

Inner conductor tip style:	08 90°conical, self-cleaning
Inner conductor tip style diameter:	1.1 mm [.043 in]
Inner conductor tip style material:	3 CuBe
Inner conductor tip style surface:	A gold
Number of inner conductors:	1
Exchangeable inner conductor:	No
Inner conductor working stroke:	1.2 mm [.047 in]
Spring force of each inner conductor at working stroke:	1.5 N [5.39 ozf]
Inner conductor maximum stroke:	2 mm [.078 in]
Inner conductor max. current load capacity:	2 A

### Electrical data

Frequency range up to:	6 GHz
Impedance:	50 Ohm

### Mechanical data

Total spring force at working stroke:	6.3 N [22.6 ozf]
Total length:	38.8 mm [1.52 in]
Barrel diameter:	5 mm [.196 in]
Installation height without receptacle:	25 mm [.984 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/24\_GB

Learn more about  
Radio-frequency test probes



ingun.com