

RoHS

Specification

Client Name :

客户名称 : _____

Client P/N :

客户品号 : _____

Product P/N :

产品型号 : **HL-EK2G3NAVS**

Sending Date :

送样日期 : _____

Client approval 客户审核		HongliZhihui Approval 鸿利智汇审核		
Approval 核准	Audit 确认	Approval 核准	Audit 确认	Confirmation 制作
				赵明深
☐ Qualified 接受	☐ Disqualified 不接受	DATE: 日期: 2020. 11. 03		

Adr : No. 1,Xianke Yi Road, Hudong Town, Huadu District, Guangzhou, China

地址 : 中国广州市花都区花东镇先科一路1号

Tel/电话 : 020-86733333

Fax/传真 : 020-86733883 86733938 86733265

Web/网址 : www.honglitronic.com

注: 1. 此规格书以中英文方式书写,若有冲突以中文版本为准文本;

2. 此规格书的最终解释权归鸿利智汇集团股份有限公司;

3. 此规格书的有效期限为两年,自盖章或签字之日起计算,期满时双方可以续签协议,但应采用书面形式;

4. 鸿利智汇集团股份有限公司提供样品和规格书请客户会签审核确认规格参数和样品,客户会签后表示认同产品的相关参数和品质性能符合客户要求。

Catalog目录

1. Product naming rules	
产品命名规则	3
2. Features	
特点	3
3. Application range	
应用范围	3
4. Specifications	
规范	4-5
5. Product bins	
产品分级	5
6. Typical Optical/Electrical Characteristics Curves	
典型光学/电性特征曲线	6
7. Package Dimensions	
封装尺寸	7
8. Label	
标签	7
9. Tape Specifications	
包装规格	8
10. Reliability	
可靠性测试	9
11. Reflow soldering instructions	
回流焊说明	9
13. Use the matters needing attention	
使用注意事项	10-11
14. Revision of curriculum vitae	
修改履历表	12

1、Product naming rules

产品命名规则

E K2 G 3 N A V
1 2 3 4 5 6 7

- 1) : 产品系列代码 Product family code
- 2) : 芯片代码 Chip code
- 3) : 表示发光颜色 The color of the light
- 4) : 表示使用700mA测试 Test with 700mA
- 5) : 透镜代码 Lens code
- 6) : 电路组合代码 Circuit code
- 7) : 支架代码 Frama code



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

2、Features 特点

- Long operating life 寿命长
- High flux 光通量高
- More energy efficient than incandescent and most halogen lamps 比白炽灯与卤素灯节能
- Low voltage DC operated 低电压直流工作
- Cool beam, safe to the touch 冷光源，接触安全
- Instant light (less than 100ns) 瞬间点亮（小于100ns）
- Fully dimmable(属于可调光)
- No UV (无紫外线)
- Superior ESD protection(较好的防静电保护)
- RoHS compliant (符合RoHS标准)

3、Applications 应用

- Fiber optic alternative/Decorative/entertainment 光纤型/装饰/娱乐
- Landscape lighting 景观照明
- Stage Lighting 舞台照明
- Scene lighting 情景照明
- Bollards/Security/Garden 光柱/安全/花园
- Architectural, landscaping and entertainment/advertising installations. 建筑，园林绿化和娱乐/广告装置照明.
- advertising installations. 建筑，园林绿化和娱乐/广告装置照明

4、Specifications规范

(1) Absolute Maximum Ratings at Ta=25°C在25°C时绝对极限条件

Parameter参数	Symbol符号	Rating 值	Units单位
Input power 输入功率	Pi	2.88	W
Forward Current 正向电流	I _F	700	mA
Surge current 冲击电流	I _{FM}	/	mA
Reverse Current反向电流	I _R	10	uA
thermal resistance Electrical thermal resistance junction /solder point Thermal热阻 (85°C)	Rth	5.5	°C/W
Junction Temperature结温	T _j	120	°C
Electrostatic Discharge (HBM) (静电)	ESD	2000	V
Operating Temperature Range工作温度	Topr	-20°C To +85°C	
Storage Temperature Range储藏温度	Tstg	-40°C To +85°C	
Lead Soldering Temperature*引线焊接温度	T _{SOL}	Max. 350°C for 3sec Max.	

Note :

1. All high power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly, but we do not recommend lighting the high power products for more than 5 seconds without a appropriate heat dissipation equipment.
所有高功率的发光LED产品安装在铝金属为核心印刷电路板, 可直接点亮, 但我们不建议在没有一个适当的散热设备时, 照明高功率LED点亮超过5秒。
2. wave peak and soak-stannum soldering etc. is not suitable for this products. 波峰焊、浸锡焊接不适合这个产品
3. Reflow soldering should not be done more than two times. The reflow temperature we recommend is 210°C.
回流焊不能超过两次, 回流焊最高温度建议210°C。
4. 1/10 Duty cycle, 0.1ms pulse width. (脉宽0.1ms, 周期1/10)

(2) Optical Characteristics at Ta=25°

Parameter参数	Symbol符号	Condition条件	Min.最低	Typ.典型	Max.最高	UnitS单位
Forward Voltage正向电压	V _F	I _F =700mA	3.0	--	4.0	V
Reverse Current反向电流	I _R	V _R =5v	--	--	10	uA
50% Power Angle发光角度	2θ1/2	I _F =700mA	120	—	140	deg
Luminous Flux光通量	φ _v	I _F =700mA	120	140	—	lm
		I _F =350mA	75	90	—	lm
Recommend Forward Current正向电流	I _{Fp}	--	--	--	700	mA
Wave Length波长	λ _D	I _F =700mA	520	--	530	nm

Notes注:

1. the products after this specification refer to the parameters prevail, before the release of specification without refer to the above parameters.
此规格书发布日后 生产的产品以上述参数为准, 发布前生产的库存品不参考上述参数。
2. Tolerance of measurement of forward voltage±3%、Color-rendering index±2、luminous flux±5%
不同标准源测试存在仪器公差: 正向电压公差为±3%、显指公差为±2、光通量公差为±5%。
3. The test is set to automatic integration, and the integral IP range is 30%~80%. 测试设置自动积分, 积分IP范围30%~80%。
4. Products are tested and binned at a transient forward current(I_F) with 700mA. With the use of different I_F, it may probably cause differences in Wave Length & forward voltage. Generally, with the increase of I_F, the Wave Length will be raised as well.
该产品通过瞬态700mA 点亮, 分光分色. 若使用不同电流, 可能会引起波长及电压的变化, 一般情况下, 使用电流增加, 波长会上升。

(3) Optical Electrical /Thermal Characteristics at Ta=25°

在Ta=25°C 时典型的电学特性

IF (mA)	VF (V)			Po (W)
	min	typ	max	
700	3	3.5	4	2.25
350	2.8	3.2	3.6	1.12






5、Product bins 产品分级 (IF=700mA)

Forward Voltage bins 电压分级	Min (V)	Max (V)
	3.0	3.2
	3.2	3.4
	3.4	3.6
	3.6	3.8
	3.8	4.0
Luminous Flux bins 光通量分级	Min (lm)	Max (lm)
	120	130
	130	140
	140	150
	150	160
	160	170
	170	185
	185	200
	200	215
Wavelength bins 波长分级	Min (nm)	Max (nm)
	520	525
	525	530

Notes:


- Products are tested and binned at a transient forward current(IF) with 700mA. With the use of different IF, it may probably cause differences in CCT & forward voltage. Generally, with the increase of IF, the CCT will be raised as well. 该产品通过瞬态700mA 点亮, 分光分色. 若使用不同电流, 可能会引起色温及电压的变化, 一般情况下, 使用电流增加, 色温会上升。
- The deviation of wavelength is allowed to be + 0.5nm.
波长的测量误差允许在±0.5nm

6、Typical Optical/Electrical Characteristics Curves典型光学/电性特征曲线 IF=700mA ($T_s=25^{\circ}\text{C}$ Unless Otherwise Noted) ($T_s=25^{\circ}\text{C}$ 除非另有注释)

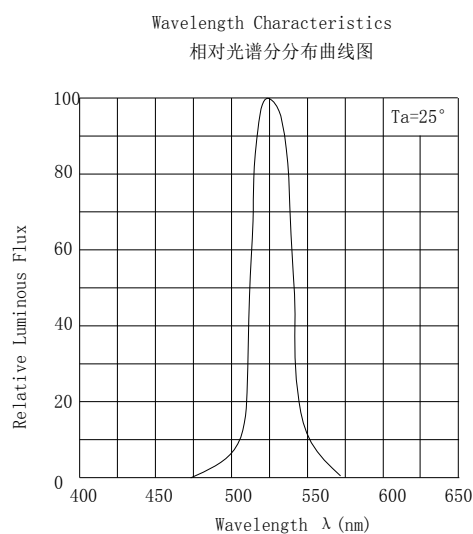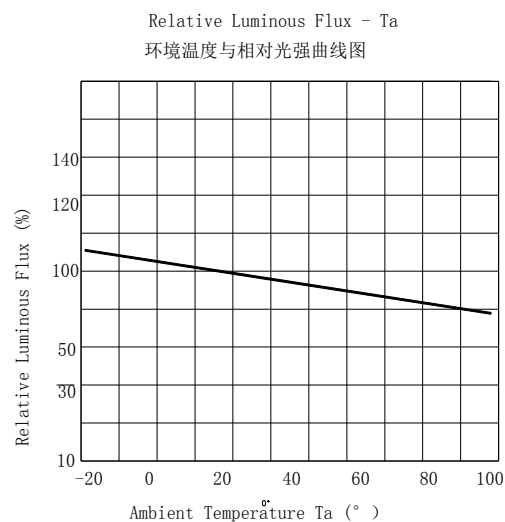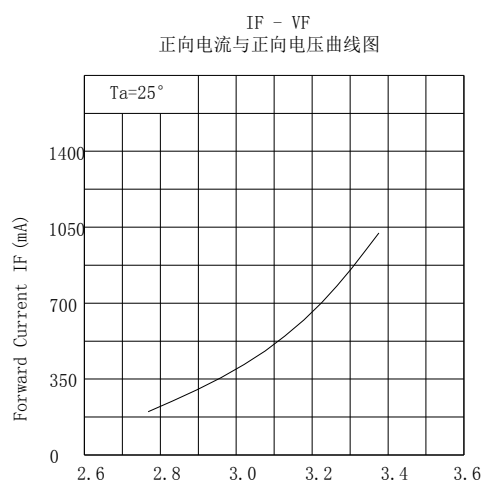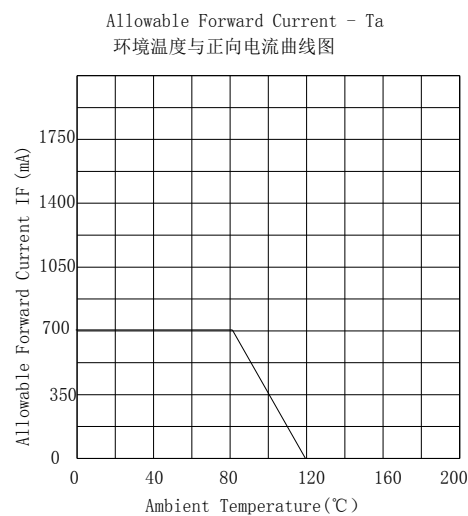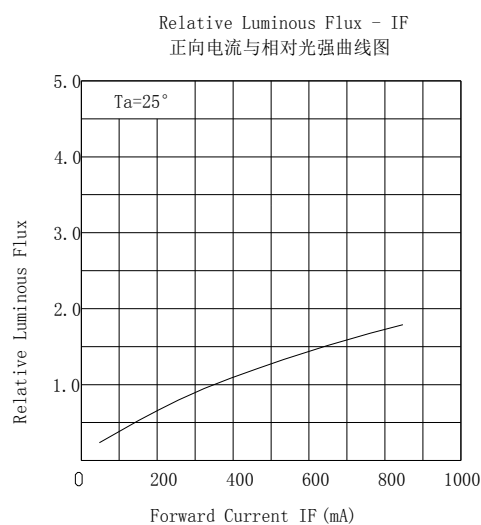




8、Package Dimensions封装尺寸

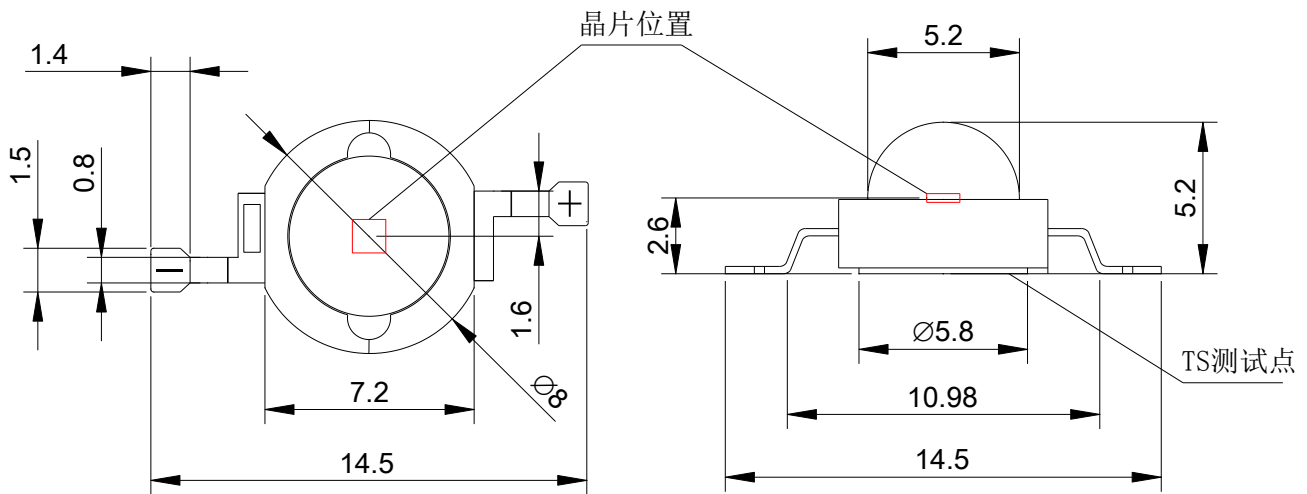

Recommended Soldering Pattern

(建议焊盘尺寸图)

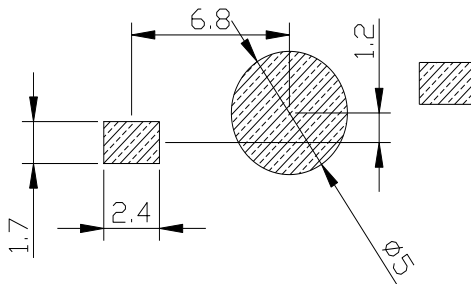

Notes注意:

- 1) All dimension units are millimeters.
所有尺寸单位均为毫米.
- 2) All dimension tolerance is $\pm 0.2\text{mm}$ unless otherwise noted. 所有尺寸误差是 ± 0.2 毫米除非另有说明

9、Label 标签

ΦV : Luminous Flux rank

光通量档次范围

VF: Forward voltage rank

正向电压档次范围

λd : Wave Length

波长

LOT.NO: Lot Number

批号



HONGLITRONIC
鸿利光电



TYPE:

QTY:

VF:

ϕV :

IF:

λd :

DATE:



LOT.NO:




9、Tape Specifications(Units:mm)包装规格 (单位:mm)

We provide tape as below 我们提供以下包装方式

Tape by reel (suitable for automatic machine) 卷轴包装 (适用于自动贴片机)

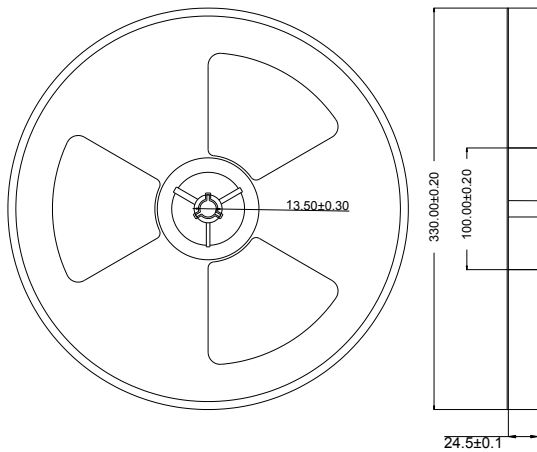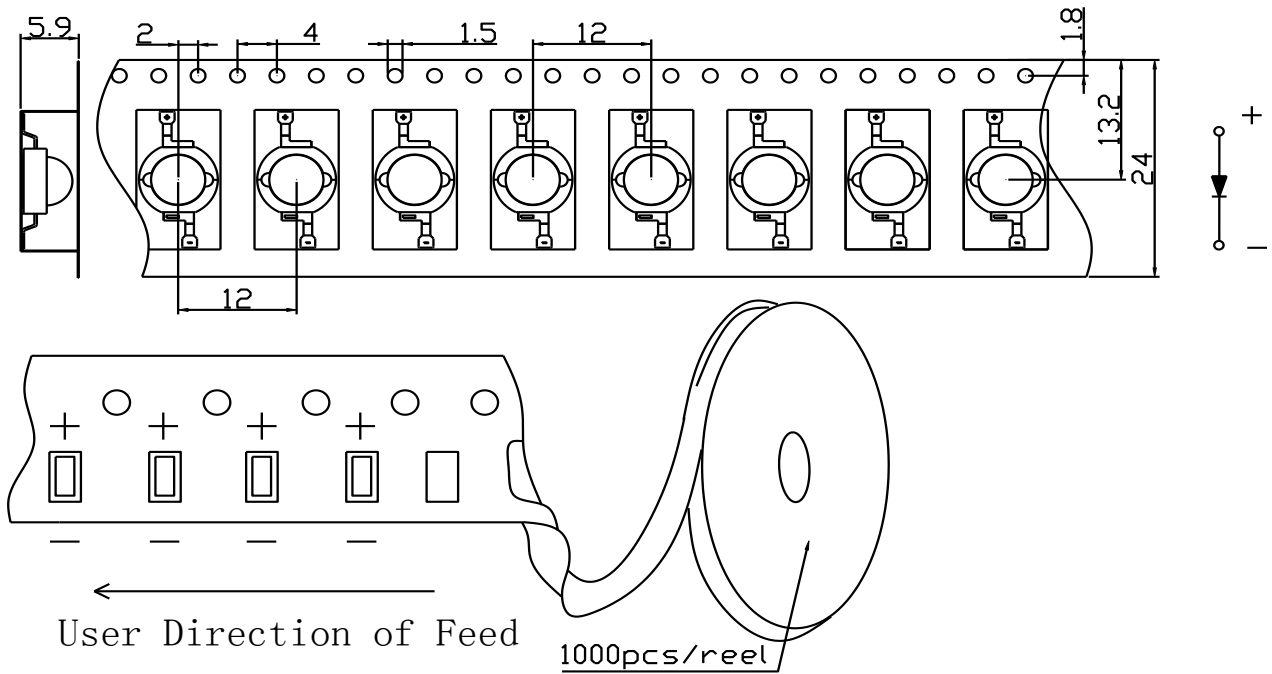

Moisture resistant packaging 防潮包装

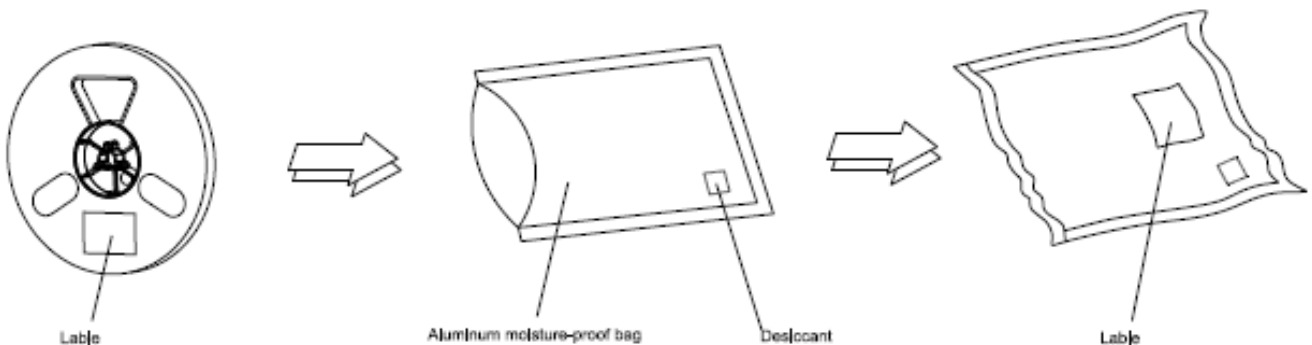


10、Reliability 可靠性测试

Test (测试项目)	Test Conditions (测试条件)	Test Duration (测试时间)	Decision criteria (判定标准)	Units Failed/Tested (失败/测试数目)
Normal Temperature Operating Life (常温寿命)	25℃ 1500mA 1008H	168H/1008H	VF≤1.1VF (初始) 光通量维持率≥90%	0/11PCS
Temperature Cycle (冷热冲击)	-40℃--100℃ 30min/1min/30min 500cycle	100cy/500cycle	无死灯、无外观不良	0/11PCS

11、Reflow soldering instructions 回流焊说明

- 1.recommend to use a convection type reflow machine with 8 zones.建议使用八温区回流焊机。
- 2.recommend to use Lead-Free Paste with a melting point between 190℃-200℃.
建议使用熔点为190℃-200℃的无铅锡膏
- 3.the reflow soldering time should not be more than 400s.总的回流焊时间不要超过400s。

Temperature-Time
温度-时间图

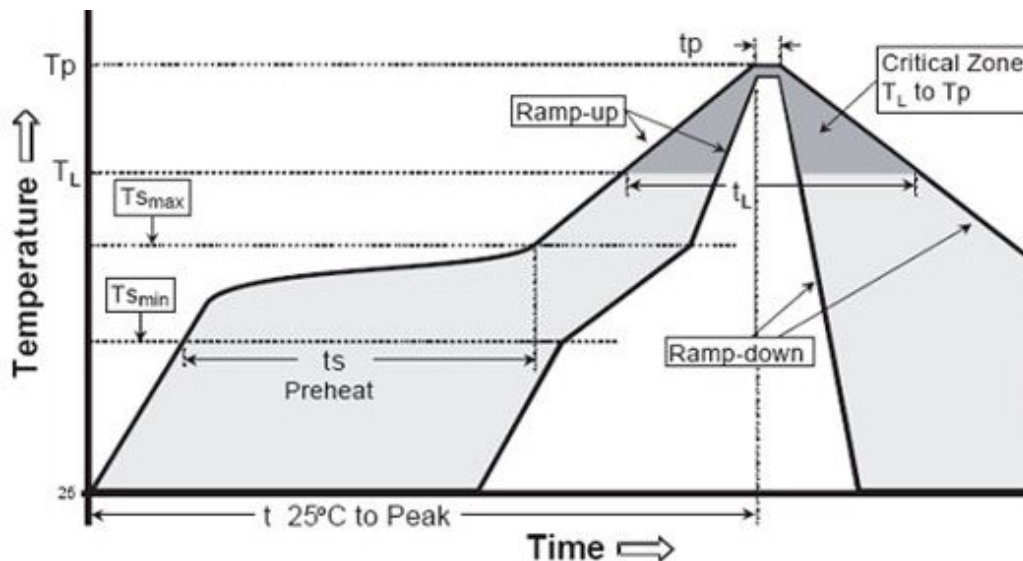

Profile Feature	Lead-Free Solder
Average Ramp-Rate (Ts _{max} to Tp)	3℃/second max
Preheat: Temperature Min (Ts _{min})	100℃
Preheat: Temperature Max (Ts _{max})	150℃
Preheat: Time (ts _{min} to ts _{max})	60-120 seconds
Time Maintained Above: Temperature (TL)	190℃
Time Maintained Above: Time (tL)	60-150 seconds
Peak/Classification Temperature (Tp)	210℃
Time Within 5℃ of Actual Peak Temperature (tp)	10-15 seconds
Ramp-Down Rate	6℃/second max
Time 25℃ to Peak Temperature	6 minutes max

11、Use the matters needing attention(使用注意事项)

一、储存(storage)：

为避免受潮，我司建议产品在未开包装前储存条件为 5~30° C，相对湿度小于60%；已开包装的LED光源请在24H内使用安装完毕；如果开封超过24H，或干燥剂变色，或使用日期超过出货标签日期两个月，必须进行除湿后才能使用！除湿条件：70℃±5℃，12H；请务必对未用完的产品进行除湿并抽真空后密封保存；

产品密封保存有效使用期为一年。

To avoid moisture, we recommend storage conditions for the unopened LED +5 ~ +30 °C, relative humidity <60%. LED should be used within 24 Hrs. of opening the package. If LED are opened more than 24Hrs, or the color of accompanied dessicant changes, or the date of using more than the date of shipping label two months, LED must to be dehumidified 12 Hrs before using. Dehumidifying condition: +70 °C±5 °C, 12 Hrs. Please make sure to dehumidify and vacuum pack the remaining/ unused LED.

Effective age for the sealed led is one year.

二、组装注意事项(the assembly notes)：

焊接条件：此产品推荐使用回流焊接的作业方式，回流曲线最高温度不可超过 210° C，（当产品为700mA 使用，请务必采用[铜柱底部焊接](#)的作业模式，如采用铜柱底部导热树脂模式，请自行评估寿命风险），如采用手工焊接，手工焊接烙铁温度设定 350° C，焊接时间不可超过 3 秒，第一焊点焊接后请确保基板表面温度恢复到环境温度，方可进行第二次的焊接；焊接完毕后请不要弯曲已焊 LED 的 PCB 板，清洗 PCB 板请使用洗板水手工擦拭，且不可直接用于流体之中。

作业或存放过程中不可有 1000g 以上的外力或尖锐物体作用于透镜表面（如压力，摩擦等外力以及钳子镊子等工具），以免造成元件损伤；

如果超出此使用条件，鸿利光电将不能保证产品的稳定性，如需使用超出的操作条件，请务必进行风险评。

Soldering Conditions: Reflow soldering is recommended for this LED, the maximum temperature of reflow should not exceed 210°C (when using at 700mA, please adopt the soldering operation mode with copper pad at the bottom. Please consider the life time risk if use the thermal conductive resin with Copper pad at the bottom). If hand soldering, set soldering iron temperature at 350°C and soldering time not More than 3 seconds, after the first soldering, make sure the substrate surface temperature returns to ambient temperature before a second soldering. Do not bend the LED PCB after soldering. Use recommended cleaning agent for PCB cleaning (Should not be use directly in the fluid)

Please make sure when soldering, there is no external force on the soldering surface (such as pressure, friction or sharp metal nails, etc.), to avoid gold wire deformation or damage and other abnormalities.

If beyond recommended conditions, we cannot guarantee the LED stability, please do the risk assessment first.

三、防静电措施(anti-Static Measures)：

请采取足够的措施来防止静电产生，比如带静电环或防静电手指套等；每个制造工程关于产品（工厂、设备、机器、载波机和运输单位）应当连接地面，避免产品电气带电。

Please take adequate measures to prevent electrostatic generation, such as wearing electrostatic ring or anti-static fingerstall etc; any relative products like plant equipment, machinery, carrier and transportation units shall be connected to discharging unit/ ground. After assembly, please make sure to discharge Static Electricity with proper ESD equipment.

四、温度控制(temperature Control)：

保证散热前提条件为：支架铜柱温度为85度以下，在此温度以下，散热符合产品寿命要求；为确保在组装时降低接触热阻，请注意底部锡膏焊接或导热膏涂布均匀且分布面积合理，不可出现太少或高低不平现象。以上散热介质需保证电介质耐压测试至少通过500V。

Recommended temperature conditions for enhanced product life: The temperature of copper pad is $<85^{\circ}\text{C}$. During assembly, please ensure that a good quality thermal paste is applied and distributed evenly over the surface. While using thermal pad (Heat Sink), make sure LED is firmly tightened and there is no gap between surfaces. This product Heating conditions, tested at 500V with medium surface contact.

五、驱动控制(drive control)：

本产品需使用恒流源进行驱动，且输出电流符合规格书上的功率使用范围，如需使用恒压源或其他使用条件，请进行使用效果风险评估。

Drive this product at constant current. Output current range specifications should be according to the operational and other conditions, as mentioned in data sheet. Before using a constant voltage source or altered specifications, other than recommended, please consider risk factors.

六、其他(other)：

本产品不可在以下条件下使用，如果产品在以下条件下使用，评估其使用效果和风险是有必要的：


- 直接或间接的打湿或受潮，比如淋雨等；
- 被海水损害或侵蚀；
- 被暴露于腐蚀性气体(如 Cl_2 , H_2S 、 NH_3 、 SO_x 、 NO_x 等)；
- 被暴露于粉尘、液体或油；

符合使用手册情况下，产品质保期为24个月，有保质协议的则以保质协议为准；产品生命周期后进行回收处理。


Product is not suitable to use in following conditions;

- Direct or indirect wet / damp conditions, such as rain, etc;
- in contact with sea water and erosive materials;
- Exposed to corrosive gases (e.g., Cl_2 , H_2S , NH_3 , SO_x , NO_x , etc.);
- Exposed to dust, liquids or oils;

In accordance with the user manual, the product shelf life is 24 months, If there is a warranty agreement, the warranty agreement shall prevail; After the produce life cycle for recycling



OK



NG

修订次数	修订人	修订内容	修订日期	版次
1	周贤	新建文件	2017. 8. 27	A/2
2	陈晓彬	增加履历表	2017. 11. 3	A/3
3	赵明深	重新排版，增加部分特性曲线，增加可靠性列表，增加注意事项，增加分bin方式列表，更新尺寸图，增加底部极性标识，增加350mAc测试典型值。	2020. 11. 3	A/4
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				