

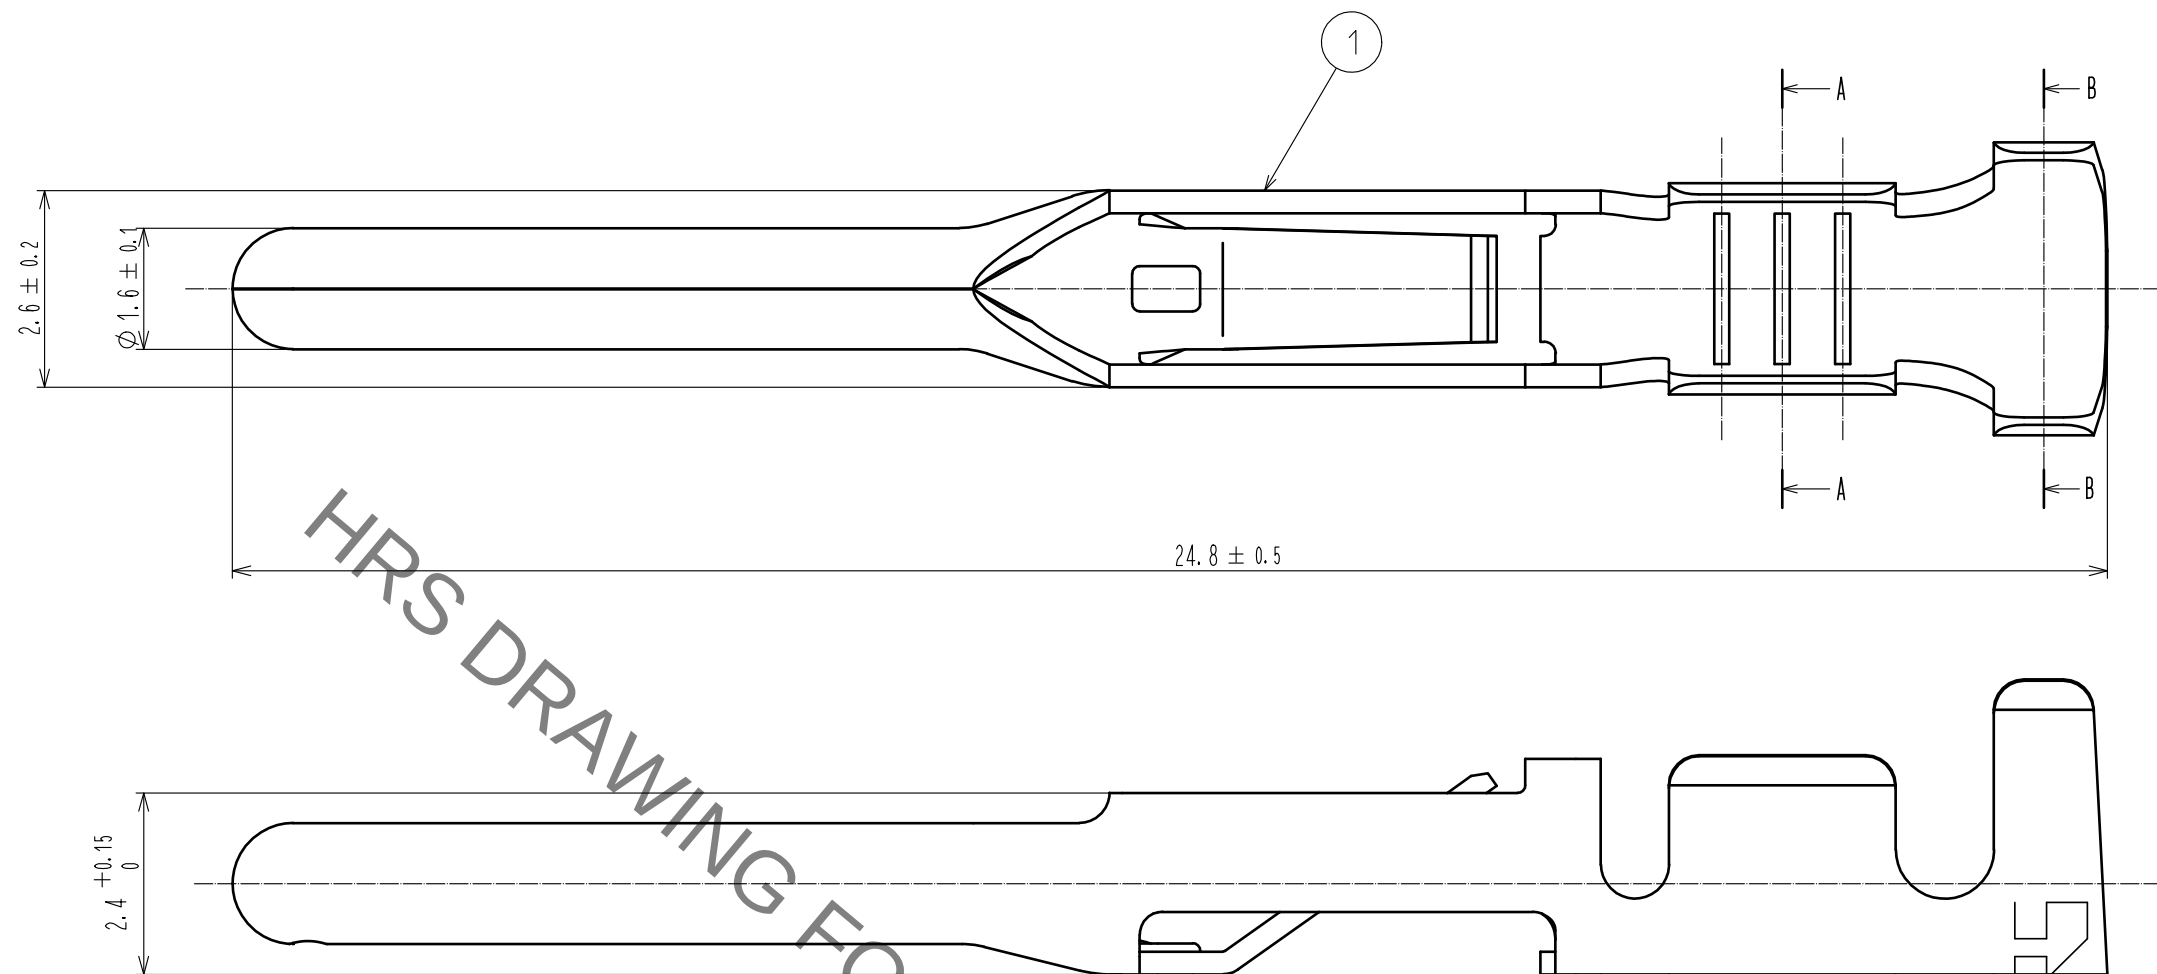



Mar.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

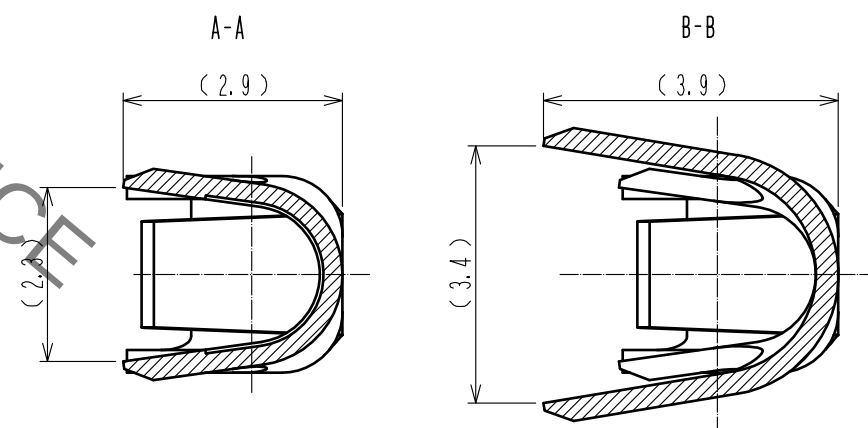

- Notes
- 1 This product is apply to the wire #16 to #20.
(Jacket diameter : $\phi 1.9$ to 3.2mm)
 - 2 Applicable crimping tool : HT802/HR41A-11-16 (CL150-0408-5)(Applicable to AWG#16)
HT802/HR41A-11-18 (CL150-0404-4)(Applicable to AWG#18)
HT802/HR41A-11-20 (CL150-0407-2)(Applicable to AWG#20)
 - 3 Applicable extraction tool : HR41A-TP(CL150-0405-7)
 - 4 Per reel : 100 contacts
 - 5 Contact plating : Gold plating $0.76\mu\text{m}$ min.
 - 1 Terminal plating : Tin plating $0.5\mu\text{m}$ min.
Underplating : Nickel plating $2\mu\text{m}$ min.



1	Copper alloy	5							
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00000101	DESIGNED HN. TANAKA	CHECKED HY. KISHI	DATE 15. 02. 10	
 HIROSE ELECTRIC CO., LTD.			APPROVED +SU. OBARA		14. 05. 16	DRAWING NO.		EDC3-118389-00	
			CHECKED +HY. KISHI		14. 05. 16	PART NO.		HR41A-PC-111	
			DESIGNED +HN. TANAKA		14. 05. 15	CODE NO.		CL141-0214-8-00	
			DRAWN +HN. TANAKA		14. 05. 15				
									1 1