# High-current probe

# HSS-150 317 300 A 3002


Item HSS-150-0014







- Trusted, robust high-current probes, optimally sized for current load capacity ratio
- Low resistance probe with Ri typical: < 10 mOhm</li>
- For use in function and burn-in tests
- Large selection of tip styles and spring forces for optimum contact with DUT
- Optimum adjustment of the stroke ratios in the test fixture: The test probe collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights











### **General data**

Product group: High-current test probe Sub-product group: Standard HSS (press-in) Series: HSS-150 5.08 mm [200 mil] Grid: Contacting from: Pad, Via, Female connector Magnetic: Yes Installation type: Plug-in Quick-exchange system: Yes Adjustable installation height: No Non-rotating: No Compatible receptacle(s): KS-150 - 100 °C [- 212 °F] Min. temperature: Max. temperature: + 200 °C [+ 392 °F] RoHS-compliant: RoHS-3;6c

# **Electrical data**

Current load capacity / rated current: 50 A Typical resistance (Ri): <10 mOhm

### Mechanical data

Total length: 38.5 mm [1.51 in] Barrel diameter: 3.5 mm [.137 in] Maximum stroke: 5.5 mm [.216 in] Spring pre-load: 1.31 N [4.71 ozf] Collar height: 02 3 N [10.7 ozf] Spring force at working stroke: Recommended working stroke: 4.4 mm [.173 in]

# Tip style data

Tip style: 17 hexagonal pyramid with cutting edges, self-cleaning Tip diameter: 3 mm [.118 in] Tip style surface: A gold 3 CuBe Tip style material:


# **HIGH-CURRENT TEST PROBE**

# High-current probe HSS-150 317 300 A 3002

Item HSS-150-0014





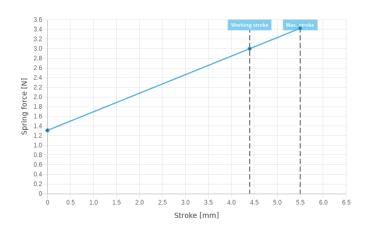

# **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about High-current test probe

