


Receptacle
KS-005 30 G
Item KS-00530G



ingun[®]
Partner for Future Technology

INGUN SELECTION

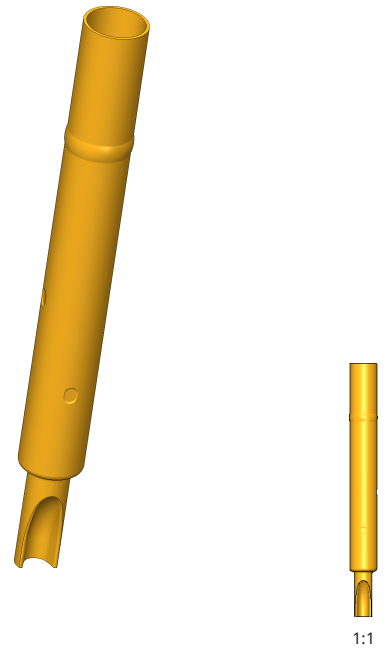

1:1

Receptacle

KS-005 30 G

Item KS-00530G



General data

Product group	Receptacles (KS)
Series	KS-005
Sub-series	KS-005 press-in version
Type of receptacle connection	Solder
Press ring	Yes
Surface area	Gold
Collar diameter	3.66 mm [.144 in]
Collar height	7.6 mm [.299 in]
Knurl	No
Vacuum-tight	No
RoHS-compliant	Yes


Mounting hole

Mounting hole in CEM1	3.53 - 3.54 mm [.138 - .139 in]
Mounting hole in FR4	3.53 - 3.54 mm [.138 - .139 in]
Mounting hole with press ring in CEM1	3.58 - 3.63 mm [.140 - .142 in]
Mounting hole with press ring in FR4	3.58 - 3.63 mm [.140 - .142 in]

Mechanical data

Total length	33.3 mm [1.31 in]
Outer diameter	3.56 mm [.140 in]

INGUN SELECTION

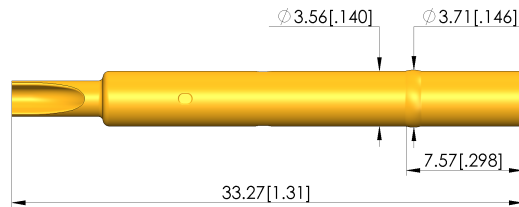

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/22 EN

Weitere Informationen zum Thema
Test probes

