

Receptacle, pre-wired

KS-040 E08 V-30

Item KS-040E08V-30



INGUN SELECTION



1:1

Receptacle, pre-wired

KS-040 E08 V-30

Item KS-040E08V-30



GO TO PRODUCT


ingun[®]

Partner for Future Technology

General data

Product group	Receptacles (KS)
Series	KS-040
Sub-series	KS-040 press-in version
Type of receptacle connection	Pre-wired
Press ring	Yes
Surface area	Gold
Collar diameter	0.82 mm [.032 in]
Collar height	7.9 mm [.311 in]
Knurl	No
Vacuum-tight	No
RoHS-compliant	Yes

INGUN SELECTION

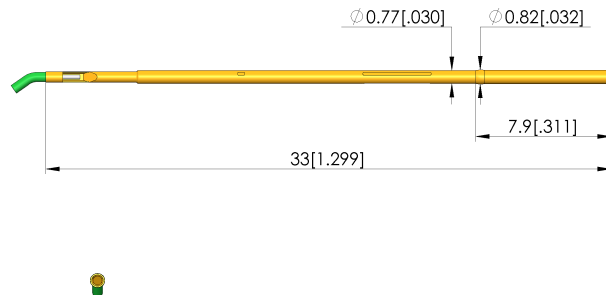

Mounting hole

Mounting hole in CEM1	0.79 - 0.80 mm [.031 - .031 in]
Mounting hole in FR4	0.79 - 0.80 mm [.031 - .031 in]

Mechanical data

Total length	33 mm [1.29 in]
Outer diameter	0.77 mm [.030 in]

Wiring data

Wire type AWG	30 type 2
Wire type	Solid
Insulating material	Polyvinylidene fluoride (kynar)
Wire outer diameter	0.54 mm [.021 in]
Wire length	1 m [39.3 in]
Wire diameter	0.25 mm [.009 in]
Wire colour	Green
Kink protection	No

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/22 EN

Weitere Informationen zum Thema
Test probes



RECEPTACLES

ingun.com