

IB130100
INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

sensor inductive, 55x12x12mm, Flush, Sn: 4, 10-30V DC, PNP NO,
Cable 2m PVC, IP67, Brass Chrome-plated


MECHANICAL FEATURES

Active area material of sensor	PBT
Ambient temperature	-25 °C ... 70 °C
Cable infeed	Axial
Cable length	2 m
Degree of protection (IP)	IP67
Design	Cuboid
Housing coating	Chrome-plated
Housing material	Brass
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Flush
Number of cores	3
Pressure-proof	-
Sensor height	55 mm
Sensor length	12 mm
Sensor width	12 mm

ELECTRICAL FEATURES

Cascadable	-
Hysteresis	10 %
No-load current	15 mA
Rated switching current	200 mA
Reverse polarity protection	+
Short-circuit protection	+
Suitable for safety functions	-
Supply voltage	10 V ... 30 V
Switching distance	4 mm
Switching frequency	800 Hz
Type of electrical connection	Cable
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	+

ELECTRICAL FEATURES

With monitoring function of downstream devices

-

Other

Packaging dimensions

77.0mm x 25.0mm x 123.0mm

Shipping weight

0.08kg

Tariff code

85365019

Classification

ipf product group

215

eClass 8.0

27270101

eClass 9.0

27270101

eClass 9.1

27270101

ETIM-5.0

EC002714


ETIM-6.0

EC002714


ETIM-7.0

EC002714

Connection

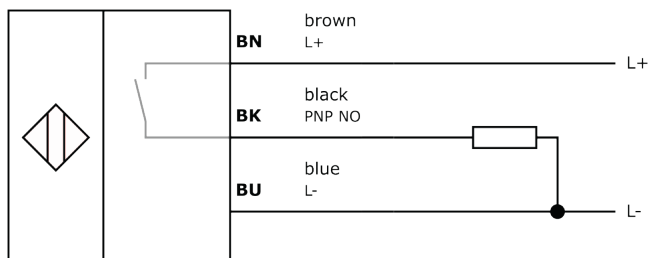

Dimensional drawing

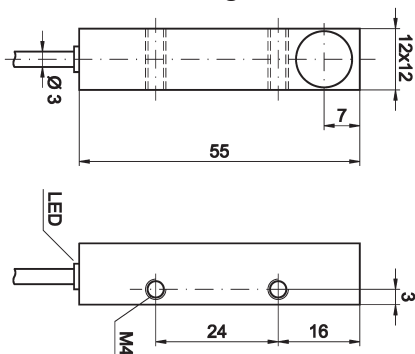

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.

