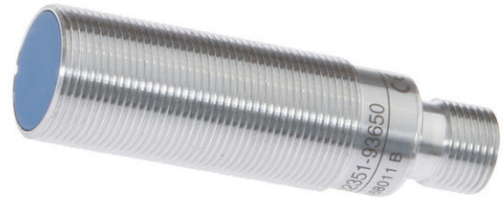


**IB180026**
**INDUCTIVE SENSORS • DISTANCE MEASUREMENT**

sensor inductive, analog, M18x1 64long, Quasi-flat, Sn: 0-10, 15-30V DC, 4-20mA, Connector M12 4pin, IP67, Brass Chrome-plated, resolution 5µm


**MECHANICAL FEATURES**

Active area material of sensor	PBTP
Ambient temperature	-25 °C ... 70 °C
Atmospheric-change resistant (temperature cycle)	-
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
High-pressure-proof sensors	-
Housing coating	Chrome-plated
Housing material	Brass
Increased ambient temperatures > 80°C	-
Mechanical mounting condition for sensor	Quasi-flat
Sensor length	63.5 mm
Thread pitch	1 mm
Thread size, metric	18

**ELECTRICAL FEATURES**

Absolute repeat accuracy	0.3 mm
Correction factor (aluminum)	0.2
Correction factor (brass)	0.3
Correction factor (copper)	0.17
Correction factor (St37)	1
Correction factor (stainl. steel)	0.65
Distance measuring sensors	+
Magnetic field resistant	-
Measuring range length	0 mm ... 10 mm
No-load current	12 mA
Number of pins	4
Operating voltage	15 V ... 30 V
Readiness delay	50 ms
Relative repeat accuracy	0.3 %
Reverse polarity protection	+
Short-circuit protection	+
Supply voltage	15 V ... 30 V
Type of analog output	4 mA ... 20 mA

## ELECTRICAL FEATURES

Type of electrical connection	Connector M12
Voltage type	DC

## OPTICAL FEATURES

Resolution	5 µm
------------	------

## OTHER FEATURES

Devices for hose mounting	-
Feeding technology	-
Harsh environmental conditions	-
Hygienic and wet area	-
Metallic sensor surface	-
Oil and cooling lubricants	-
Ring-shaped sensors	-
Welding-proof sensors	-


## Other


Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.07kg
Tariff code	85365019

## Classification

ipf product group	209
eClass 8.0	27270802
eClass 9.0	27270802
eClass 9.1	27270802
ETIM-5.0	EC001818
ETIM-6.0	EC001818
ETIM-7.0	EC001818

## Connection

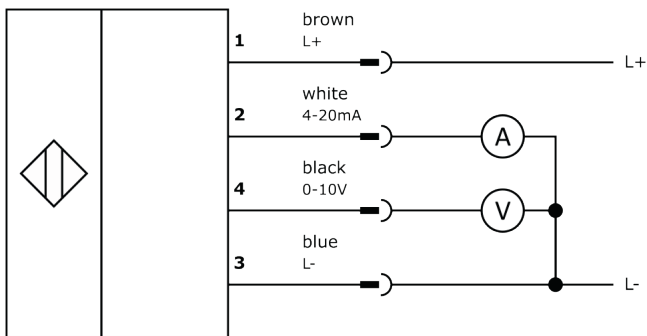

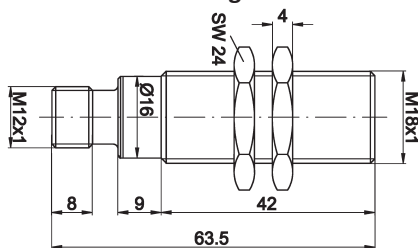**Dimensional drawing****Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.