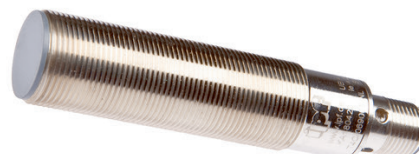


**KA180420**
**CAPACITIVE SENSORS • NORM SWITCHING DISTANCE**

sensor capacitive, preferential, M18x1 83long, Flush, Sn: 1-8, PNP  
Anticoincidence, Connector M12, IP67, Brass Nickel-plated


**MECHANICAL FEATURES**

Ambient temperature	-25 °C ... 70 °C
Degree of protection (IP)	IP67
Design	Cylinder, screw-thread
Housing coating	Nickel-plated
Housing material	Brass
Mechanical mounting condition for sensor	Flush
Pressure-proof	-
Sensor length	83 mm
Thread length	55 mm
Thread pitch	1 mm
Thread size, metric	18

**ELECTRICAL FEATURES**

Cascadable	-
Rated switching current	200 mA
Suitable for safety functions	-
Switching distance	5 mm
Switching distance	1 mm ... 8 mm
Type of electrical connection	Connector M12
Type of switching function	Anticoincidence
Type of switching output	PNP
Voltage type	DC
With monitoring function of downstream devices	-

**OTHER FEATURES**

Level detection	+
-----------------	---


**Other**

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.08kg
Tariff code	85365019

## Classification

ipf product group	243
eClass 8.0	27270102
eClass 9.0	27270102
eClass 9.1	27270102
ETIM-5.0	EC002715
ETIM-6.0	EC002715
ETIM-7.0	EC002715

## Connection

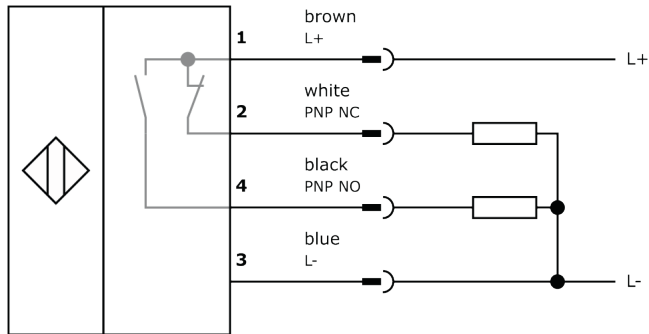

## Dimensional drawing

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.