

OR140404**OPTICAL SENSORS • RETRO-REFLECTIVE SENSORS**

sensor optical, reflective, 27x16x12mm, Polarized red light, Point, Sn: 4000, 10-30V DC, PNP Anticoincidence, Cable 2m PVC, IP65, Plastic ASA+PMMA, With polarizing filter

**MECHANICAL FEATURES**

Ambient temperature	-25 °C ... 65 °C
Cable length	2 m
Degree of protection (IP)	IP65
Design	Cuboid
Housing material	Plastic ASA
Increased ambient temperatures >70°C	-
Material of cable sheath	PVC
Material of optical surface	PMMA
Max. tightening torque	0.5 Nm
Number of cores	4
Reflector included in the scope of delivery	-
Sensor height	27 mm
Sensor length	16.3 mm
Sensor width	12 mm
Volume	Small

ELECTRICAL FEATURES

Alarm output	-
Clock frequency of the transmitter	15 kHz
Decay time	0.5 ms
Function test	-
Interference suppression	+
Max. switching distance	4000 mm
No-load current	25 mA
Operating voltage	10 V ... 30 V
Rated switching current	100 mA
Rated switching distance	4000 mm
Residual ripple	20 %
Response time	0.5 ms
Reverse polarity protection	+
Scanning function	Light-/dark-on mode
Short-circuit protection	+
Switching frequency	1000 Hz

ELECTRICAL FEATURES

Type of electrical connection	Cable
Type of input voltage	DC
Type of switching function	Anticoincidence
Type of switching output	PNP
Voltage drop	1.8 V
Voltage type	DC
With LED display	+
With polarizing filter	+
With time function	-

OPTICAL FEATURES

Light source	Polarized red light
Wavelength of the sensor	660 nm
Light beam form	Point
For transparent objects	-


Other


Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.05kg
Tariff code	85365019

Classification

ipf product group	100
eClass 8.0	27270902
eClass 9.0	27270902
eClass 9.1	27270902
ETIM-5.0	EC002717
ETIM-6.0	EC002717
ETIM-7.0	EC002717

Connection

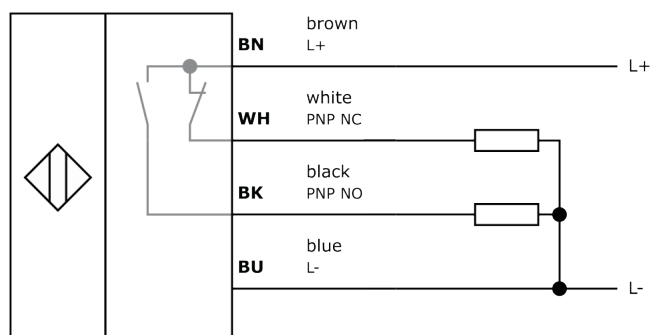

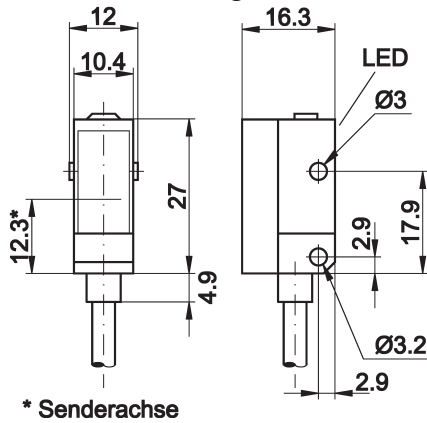Dimensional drawing**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.