

OR430370

OPTICAL SENSORS • RETRO-REFLECTIVE SENSORS

sensor optical, reflective, 43x32x15mm, Polarity free red light, Point, Teach-In, Sn: 7000, 10-30V DC, PNP Programmable/configurable, Connector M8 4pin, IP67, Plastic ASA+PMMA, For transparent objects



MECHANICAL FEATURES

Ambient temperature	-25 °C ... 65 °C
Degree of protection (IP)	IP67
Design	Cuboid
Housing material	Plastic ASA
Increased ambient temperatures >70°C	-
Material of optical surface	PMMA
Max. tightening torque	0.8 Nm
Reflector included in the scope of delivery	-
Sensor height	43 mm
Sensor length	32.5 mm
Sensor width	14.8 mm
Volume	Small

ELECTRICAL FEATURES

Alarm output	-
Decay time	0.1 ms
Function test	-
Interference suppression	-
Max. switching distance	7000 mm
No-load current	40 mA
Number of pins	4
Operating voltage	10 V ... 30 V
Rated switching current	100 mA
Rated switching distance	7000 mm
Response time	0.1 ms
Reverse polarity protection	+
Scanning function	Light-/dark-on mode
Setting procedure	Teach-In
Short-circuit protection	+
Switching frequency	5000 Hz
Type of electrical connection	Connector M8
Type of input voltage	DC
Type of switching function	Programmable/configurable

ELECTRICAL FEATURES

Type of switching output	PNP
Voltage drop	2.2 V
Voltage type	DC
With LED display	+
With polarizing filter	-
With time function	-

OPTICAL FEATURES

Light source	Polarity free red light
Wavelength of the sensor	660 nm
Light beam form	Point
For transparent objects	+


Other


Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.02kg
Tariff code	85365019

Classification

ipf product group	100
eClass 8.0	27270902
eClass 9.0	27270902
eClass 9.1	27270902
ETIM-5.0	EC002717
ETIM-6.0	EC002717
ETIM-7.0	EC002717

Connection

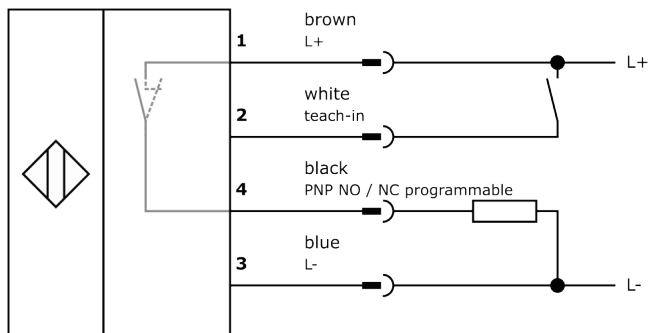

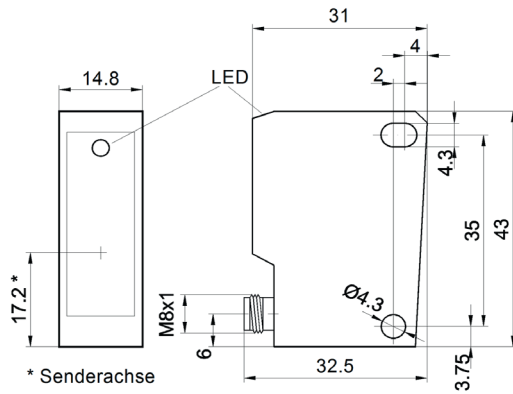Dimensional drawing**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.