

**OT140405**
**OPTICAL SENSORS • DIFFUSE REFLECTION SENSORS WITH INTENSITY DIFFERENTIATION**

sensor optical, diffuse-reflection sensor, 27x14x12mm, Sn: 5-200, 10-30V DC, 2x PNP Anticoincidence, Cable 2m PUR (Polyurethane), IP65, Plastic ASA+PMMA, 0.5kHz, Polarity free red light, Point, Manual adjustment


**MECHANICAL FEATURES**

Ambient temperature	-25 °C ... 65 °C
Cable length	2 m
Degree of protection (IP)	IP65
Design	Cuboid
Housing material	Plastic ASA
Material of cable sheath	PUR (Polyurethane)
Material of optical surface	PMMA
Max. tightening torque	0.5 Nm
Number of cores	4
Reflector included in the scope of delivery	-
Sensor height	27 mm
Sensor length	14 mm
Sensor width	12 mm
Volume	Small
Wire cross section	0.34 mm <sup>2</sup>
With interchangeable lens	-

**ELECTRICAL FEATURES**

Alarm output	-
Decay time	1 ms
Equipment protection class	Protection class 3
High repeat accuracy	-
Interference suppression	+
Max. switching distance	200 mm
No-load current	30 mA
Number of switching outputs	2
Operating voltage	10 V ... 30 V
Pre-failure message	-
Rated switching current	100 mA
Response time	1 ms
Reverse polarity protection	+
Scanning function	Light-/dark-on mode
Sensing range	5 mm ... 200 mm

**ELECTRICAL FEATURES**

Setting procedure	Manual adjustment
Short-circuit protection	+
Suitable for safety functions	-
Switching frequency	500 Hz
Type of electrical connection	Cable
Type of switching function	Anticoincidence
Type of switching output	PNP
Voltage drop	1.8 V
Voltage type	DC
With communication interface, RS-232	-
With LED display	+
With monitoring function of downstream devices	-
With other analog output	-
With restart lock	-
With time function	-

**OPTICAL FEATURES**

Light source	Polarity free red light
Wavelength of the sensor	660 nm
Light exit	Axial
Light beam form	Point
Small light beam diameter	-
Line scanner	-

**OTHER FEATURES**

Feeding technology	+
For gloss queries	-
Is line scan camera	-


**Other**

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.05kg
Tariff code	85365019


**Classification**

ipf product group	100
eClass 8.0	27270903
eClass 9.0	27270903
eClass 9.1	27270903
ETIM-5.0	EC001821
ETIM-6.0	EC001821
ETIM-7.0	EC001821

## Connection

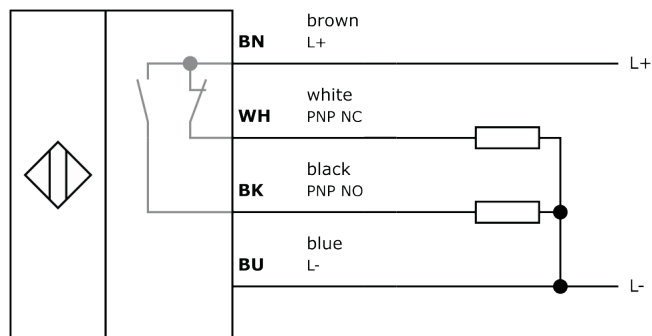

## Dimensional drawing

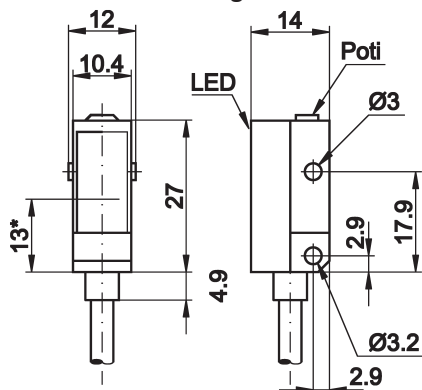

\* Senderachse

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.