

OT991326
OPTICAL SENSORS • DIFFUSE REFLECTION SENSORS WITH BACKGROUND SUPPRESSION

sensor optical, diffuse-reflection sensor, 68x40x20mm, Sn: 100-2000, 10-30V DC, 1x PNP Anticoincidence, Connector M12 3pin, IP67, Plastic+Plastic, 0.25kHz, Background suppression, Infrared light, Point, Manual adjustment


MECHANICAL FEATURES

Ambient temperature	-20 °C ... 55 °C
Degree of protection (IP)	IP67
Design	Cuboid
Housing material	Plastic
Material of optical surface	Plastic
Number of cores	3
Reflector included in the scope of delivery	-
Sensor height	68 mm
Sensor length	40 mm
Sensor width	20 mm
Shock resistance	50 g
Storage temperature	-20 °C ... 70 °C
Vibration resistance	55 Hz
Volume	Medium

ELECTRICAL FEATURES

Adjustment range	100 mm ... 2000 mm
Analog output 0 mA ... 20 mA	-
Analog output 0 V ... 10 V	-
Analog output -10 V ... +10 V	-
Analog output 4 mA ... 20 mA	-
Decay time	2 ms
Hysteresis	10 %
Interference suppression	+
Max. switching distance	2000 mm
No-load current	55 mA
Number of pins	3
Number of switching outputs	1
Operating voltage	10 V ... 30 V
Rated switching current	100 mA
Rated switching distance	2000 mm
Residual ripple	15 %
Response time	2 ms

ELECTRICAL FEATURES

Reverse polarity protection	+
Scanning function	Light-/dark-on mode
Sensing range	100 mm ... 2000 mm
Setting procedure	Manual adjustment
Short-circuit protection	+
Switching frequency	250 Hz
Type of electrical connection	Connector M12
Type of switching function	Anticoincidence
Type of switching output	PNP
Voltage drop	1 V
Voltage type	DC
With LED display	+
With LED display (signal)	+
With other analog output	-
With time function	-

OPTICAL FEATURES

Light source	Infrared light
Wavelength of the sensor	880 nm
Triangulation	Background suppression
Light beam form	Point
Background suppression	+


Other

Packaging dimensions	77.0mm x 25.0mm x 123.0mm
Shipping weight	0.06kg
Tariff code	85365019

Classification

ipf product group	700
eClass 8.0	27270904
eClass 9.0	27270904
eClass 9.1	27270904
ETIM-5.0	EC002719
ETIM-6.0	EC002719
ETIM-7.0	EC002719

Connection

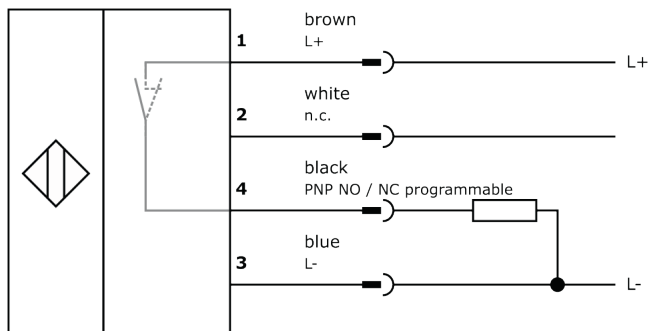

Dimensional drawing

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.