

**VK03E210**
**CONNECTION TECHNOLOGY • CABLE SOCKETS / CONNECTORS PRE-ASSEMBLED ON TWO SIDES**

, 0.3m, M12 Female (socket) 4pin Straight, M12 Male (plug) 12pin Straight, 4wire, PUR (Polyurethane) Black, 30V, -30-90°C, IP67, Suitable for trailing chain and torsion resistant, Oil and cooling lubricants, Welding area, Silicone-free


**MECHANICAL FEATURES**

|                              |                               |
|------------------------------|-------------------------------|
| Ambient temperature          | -30 °C ... 90 °C              |
| Cable infeed of A connection | Straight                      |
| Cable infeed of B connection | Straight                      |
| Cable length                 | 0.3 m                         |
| Cable sheath color           | Black                         |
| Contact body material        | Brass                         |
| Contact coating material     | Gold                          |
| Degree of protection (IP)    | IP67                          |
| Material of cable sheath     | PUR (Polyurethane)            |
| Max. tightening torque       | 1 Nm                          |
| Number of cores              | 4                             |
| Suitable for trailing chain  | +                             |
| Torsion cycles               | +/-360°/m, ≥ 2 million cycles |
| Trailing chain cycles        | 5 million cycles              |
| Version                      | Connection cable              |

**ELECTRICAL FEATURES**

|                                       |                 |
|---------------------------------------|-----------------|
| Number of pins of A connection        | 4               |
| Number of pins of B connection        | 12              |
| Rated current                         | 1.5 A           |
| Rated voltage                         | 30 V            |
| Shielded                              | -               |
| Type of A electrical connection       | M12             |
| Type of B electrical connection       | M12             |
| Type of cable                         | Multi-core      |
| Type of plug-in contact, A connection | Female (socket) |
| Type of plug-in contact, B connection | Male (plug)     |
| With LED display                      | -               |

**OTHER FEATURES**

|                 |                                 |
|-----------------|---------------------------------|
| Flame retardant | In accordance with EN 60332-2-2 |
| Free of LABS    | +                               |
| Halogen-free    | +                               |

## OTHER FEATURES

|                                                   |   |
|---------------------------------------------------|---|
| Hydrolysis-proof                                  | + |
| IR-networked                                      | - |
| Oil and cooling lubricants                        | + |
| Ozone and UV-resistant                            | + |
| Silicone-free                                     | + |
| Suitable for trailing chain and torsion resistant | + |
| Welding area                                      | + |


## Other

|                      |                      |
|----------------------|----------------------|
| Packaging dimensions | 140mm x 20mm x 220mm |
| Shipping weight      | 0.04kg               |
| Tariff code          | 85444290             |


## Classification

|                   |          |
|-------------------|----------|
| ipf product group | 700      |
| eClass 8.0        | 27279218 |
| eClass 9.0        | 27060311 |
| eClass 9.1        | 27060311 |
| ETIM-5.0          | EC001855 |
| ETIM-6.0          | EC001855 |
| ETIM-7.0          | EC001855 |

## Connection

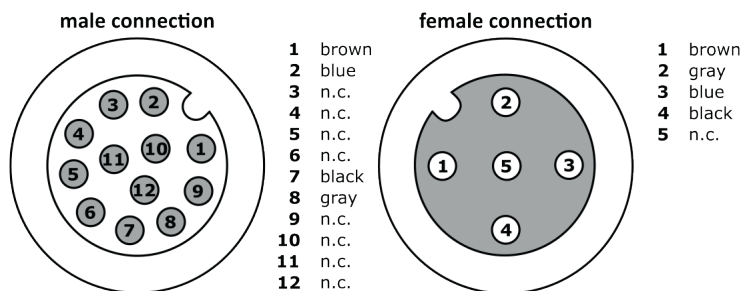

## Dimensional drawing

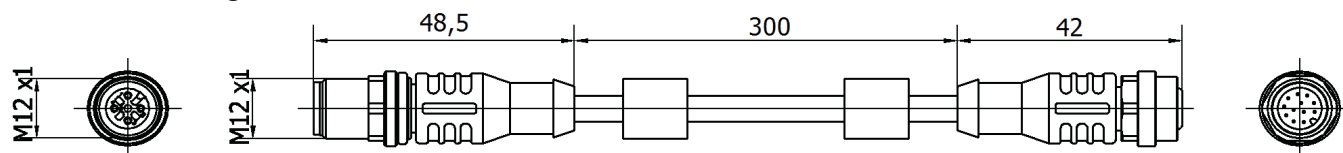

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



**Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.