

VK200361
CONNECTION TECHNOLOGY • CABLE SOCKETS / CONNECTORS PRE-ASSEMBLED ON ONE SIDE

, 2m, M5 Female (socket) 4pin Angular, Free conductor end,
4x0.14mm², PUR (Polyurethane), 125V, IP67, Oil and cooling lubricants


MECHANICAL FEATURES

Cable infeed of A connection	Angular
Cable length	2 m
Degree of protection (IP)	IP67
Material of cable sheath	PUR (Polyurethane)
Number of cores	4
Perm. ambient temperature of cable, fixed cable	-25 °C ... 80 °C
Suitable for trailing chain	+
Version	Connection cable
Wire cross section	0.14 mm ²

ELECTRICAL FEATURES

Number of pins of A connection	4
Rated voltage	125 V
Shielded	-
Type of A electrical connection	M5
Type of B electrical connection	Free conductor end
Type of plug-in contact, A connection	Female (socket)

OTHER FEATURES

Flame retardant	No
Halogen-free	+
IR-networked	-
Oil and cooling lubricants	+


Other

Packaging dimensions	160mm x 15.0mm x 160mm
Shipping weight	0.04kg
Tariff code	85444290

Classification


ipf product group	856
eClass 8.0	27279218
eClass 9.0	27060311
eClass 9.1	27060311
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855

Connection



- 1 brown
- 2 white
- 3 black
- 4 blue

Dimensional drawing

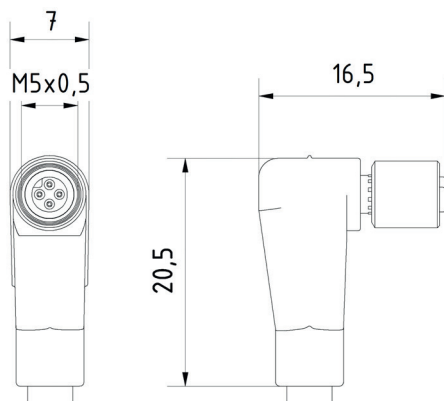

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality. LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.