
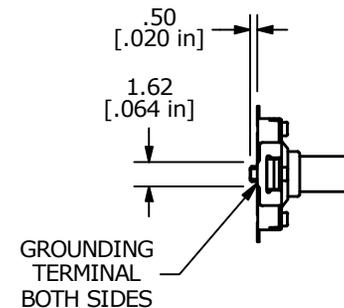
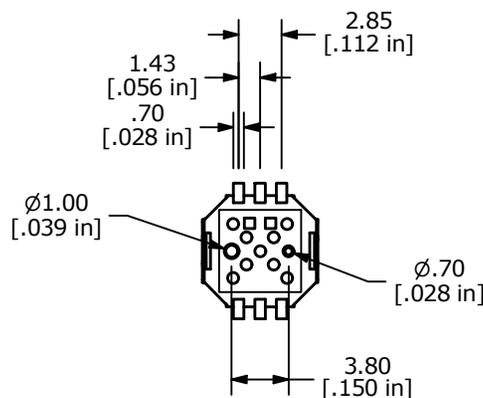
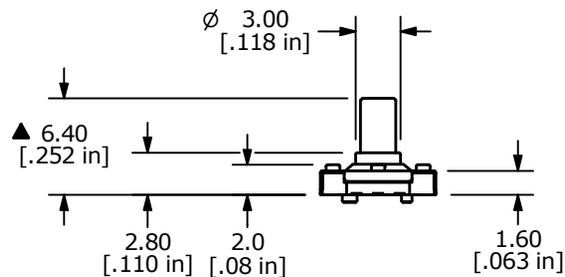


| OPERATING POSITION | CIRCUIT |
|--------------------|---------|
| A                  | ⑤-①     |
| B                  | ⑤-④     |
| C                  | ⑤-③     |
| D                  | ⑤-⑥     |
| CENTER PUSH        | ⑤-②     |

NOTES:

- RATING: 12V DC 50mA MAX.
- CONTACT RESISTANCE: 100 milli OHMS MAX.
- OPERATING FORCES:  
 CENTER PUSH: 360 ± 60gf  
 STROKE: 0.25 +0.1/-0.2 mm  
 4-WAY DIRECTION: 160 ± 50gf  
 TRAVEL: 5° +2.5°/-1°
- LIFE CYCLES: 100,000
- INSULATION RESISTANCE 100M OHMS@100VDC
- DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE.
- OPERATING TEMPERATURE: -25°C to +70°C
- STORAGE TEMPERATURE: -40°C to +85°C
- GENERAL TOLERANCE: ± 0.3
- ▲ DENOTES CRITICAL PARAMETER.

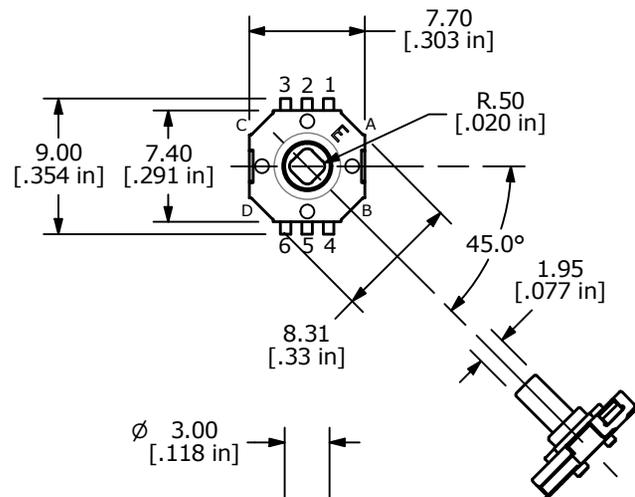

|     |        |             |         |    |
|-----|--------|-------------|---------|----|
| A   | 24827  | Release     | 3/31/21 | MW |
| REV | PCR NO | DESCRIPTION | DATE    | BY |

|           |           |           |         |     |
|-----------|-----------|-----------|---------|-----|
| E-SWITCH® |           |           |         |     |
| TITLE     |           | JS1400DFQ |         |     |
| SCALE     | DATE      | DR        | DWG     | REV |
| 2:1       | 3/31/2021 | MW        | N211131 | A   |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED