



護線套 MOVEABLE BUSHING

用途：用於電線出線口，防止電線機殼刮傷。



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm





Part No.	Package
KGC-025-8	500

活用護線套 MOVEABLE BUSHING



用途：用於電線出線口，防止電線機殼刮傷。




- Material: PE
- Color: Natural
- Unit: mm



切型
【KG-16S】





平面型
【KG-016C】

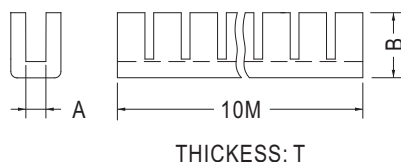

Part No.	A	B	T	Package
KG-010	1.1	5.2	0.9~1.1	10M
KG-012	1.3	5.4	1.1~1.3	
KG-016	1.7	5.4	1.45~1.75	
KG-016S	1.6	5.3	1.45~1.75	
KG-016C	1.7	5.4	1.45~1.75	
KG-020	2.2	5.4	1.8~2.2	
KG-024	2.7	5.7	2.25~2.6	
KG-030	3.3	6.1	2.85~3.25	
KG-040	4.3	6.5	3.85~4.25	



- Material: Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural
- Unit: mm



CHASSIS THICKNESS: T

Part No.	A	B	C	L	T	Package
KG-006N	0.6	3.8	3.1	260.0	0.5~0.7	500
KG-008N	0.8	3.8	3.1	260.0	0.7~0.9	
KG-010N	1.0	3.8	3.3	260.0	0.9~1.1	
KG-012N	1.2	3.8	3.5	260.0	1.1~1.3	
KG-014N	1.4	3.8	3.65	260.0	1.3~1.5	
KG-014N-290	1.4	3.8	3.65	260.0	1.3~1.5	
KG-016N	1.6	3.8	3.9	260.0	1.4~1.7	
KG-016LN	1.6	5.3	4.5	256.0	1.0~1.5	
KG-020N	2.0	3.8	4.3	260.0	1.8~2.0	
KG-025N	2.5	3.8	4.8	260.0	2.0~2.5	
KG-030N	3.0	4.8	6.2	260.0	2.5~3.0	