

Contact clamp

KK-541 400 FC 1410 M2 3S05 A

Item KK-541-0002





GO TO PRODUCT



ingun[®]

Partner for Future Technology

INGUN SELECTION

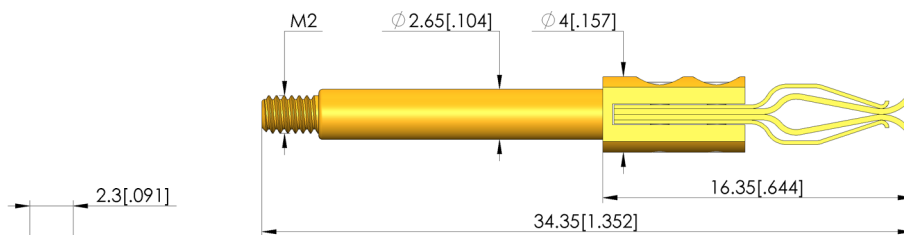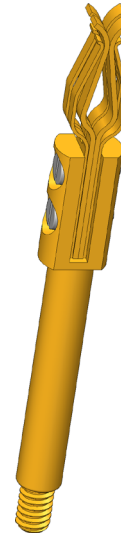

Example of contact at working stroke

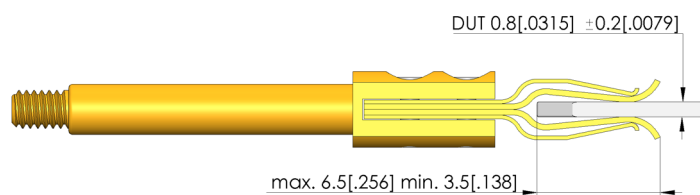

HIGH-CURRENT TEST PROBE

Contact clamp

KK-541 400 FC 1410 M2 3S05 A

Item KK-541-0002



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group: High-current test probe
Sub-product group: High-current clamps (flat/round)
Series: KK-541 M screw-in
Grid: 4 mm [157 mil]
Contacting from: Flat contact
Magnetic: Yes
Installation type: Screw-in
Quick-exchange system: Yes
Adjustable installation height: No
Non-rotating: Yes
Screw-in torque: 10 - 20 cNm [.885 - 1.77 lbf·in]
Compatible receptacle(s): KS-113 30 M2-R-S
Min. temperature: - 100 °C [- 212 °F]
Max. temperature: + 200 °C [+ 392 °F]
RoHS-compliant: RoHS-3;6c

Electrical data

Current load capacity / rated current: 20 A
Typical resistance (Ri): <5 mOhm

Mechanical data

Total length: 34.35 mm [1.35 in]
Barrel diameter: 2.65 mm [.104 in]
Collar height: 07

Tip style data

Tip style surface: A gold
Tip style material: 3 CuBe

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 04/24_GB

Learn more about
High-current test probe



ingun.com