


KLE Connector

for multi-wire Cu cables

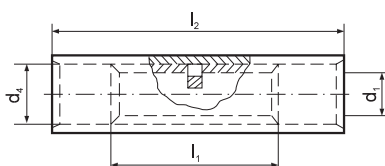

With polyamide insulation
 Thermal resistance: to +95°C
 Material: galvanically tinned copper

Cross section [mm²]	Symbol	d ₁ [mm]	d ₂ [mm]	l ₁ [mm]	l ₂ [mm]	Weight [g/pce]	Unit [pcs]	Crimping tools
0,5 ÷ 1	KLE 1	1,6	3,2	15	25	1,18	100	
1,5 ÷ 2,5	KLE 2,5	2,3	4,2	15	25	1,70	100	PR33, E11-6, RE6, PP8, PP19
4	KLE 4	3	5	15	25	2,30	50	
6	KLE 6	3,8	5,5	15	25	2,32	50	PR33, E11-6, RE6, PP8, PP19
10	KLE 10	4,5	6,9	20	32	4,88	50	EPZC300, EPZ300, GZ300, HRZ300, PRZ240, GO300, HR300, GU300, GU120, HR100-U, PR240, PR120, PR50, R50, PP19, RE16

■ ■ ■ Insulation colours

VO class insulation on request – symbol e.g. KLE 1-VO.